


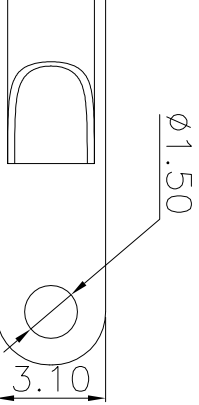


|           |            |            |
|-----------|------------|------------|
| Model No. | DC-099-20A | DC-099-25A |
| PIN       | ∅2.0       | ∅2.5       |



Rating: 3A 20V DC  
 Contact Resistance: 100 mΩ Max.  
 Operating temperature: -20°C ~ 70°C  
 Operating force: 3-20N  
 Operating Life: 5,000 cycles

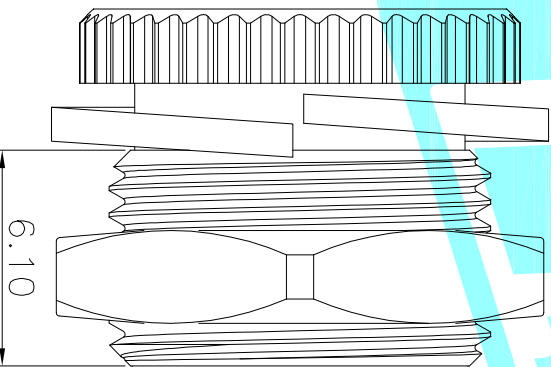

|           |           |         |        |            |
|-----------|-----------|---------|--------|------------|
| ②         | Terminal  | 2       | COPPER | Ni Plating |
| ①         | Housing   | 1       | Nylon  | White      |
| ITEM      | PART NAME | TER'NO. | QTY.   | MATERIAL   |
| APPROVALS |           | DATE    |        |            |

DRAWN J.X.Zhong 2013/11/11  
 TITLE: ELECTRONICS CO.,LTD

CHECKED  
 APPROVALS  
 PART NO. DC-099  
 PHONE JACKES

|         |      |       |              |         |        |        |                              |                         |          |            |       |              |
|---------|------|-------|--------------|---------|--------|--------|------------------------------|-------------------------|----------|------------|-------|--------------|
| ECN NO. | REV. | DATE. | DESCRIPTION. | CHANGE. | CHECK. | APPRO. | TOLERANCES ARE               | ANGLE                   | UNIT: mm | SCALE: 1:1 | PROJ: | SHEET 1 OF 1 |
|         | A    |       | NEW          |         |        |        | 30~0.1±<br>10~0.20<br>5~0.10 | ±0.30<br>±0.20<br>±0.15 | ±2°      |            |       |              |