

120 DC Fan Series x120x25mm

UL us CE RoHS

Optional Features



GENERAL SPECIFICATIONS


Bearing Type: Sleeve Bearing & Ball Bearing
 Material: Impeller & Frame: Plastic (UL94V-0)
 Lead Wire: UL Type
 Operation Temperature: -10°C~70°C, 35%~85%RH
 Storage Temperature: -40°C~80°C, 35%~85%RH



SPECIFICATIONS

Model	Bearing System		Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Weight
	Ball	Sleeve	VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	g
SD1225H1X	●	●	12.0	7.0~13.8	0.80	3800	135.5	10.2	49	140
SD1225M1X	●	●			0.50	3000	108.8	6.4	44	
SD1225L1X	●	●			0.30	2200	79.0	3.5	36	
SD1225H2X	●	●	24.0	15~27.6	0.45	3800	135.5	10.2	49	
SD1225M2X	●	●			0.35	3000	108.8	6.4	44	
SD1225L2X	●	●			0.22	2200	79.0	3.5	36	
SD1225H4X	●	●	48.0	24~55.2	0.30	3800	135.5	10.2	49	
SD1225M4X	●	●			0.25	3000	108.8	6.4	44	
SD1225L4X	●	●			0.15	2200	79.0	3.5	36	

DIMENSIONS DRAWING

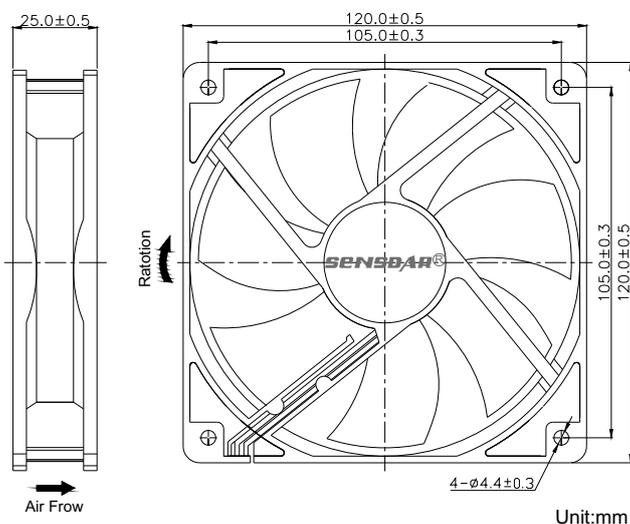

Note:

- *All readings are typical values at rated voltage.
- *Specifications are subject to change without prior notice.
- *"X" in model list can be B, S, and C, meaning Dual Ball Bearing, Sleeve Bearing and 1 Ball 1 Sleeve Bearing

P&Q CURVE (AT RATED VOLTAGE)

