


DONGGUAN INGHAI ELECTRONICS CO.,LTD

Model NO: GPD5330L

A: DIMENSIONS Unit: mm Tolerance: ± 0.5

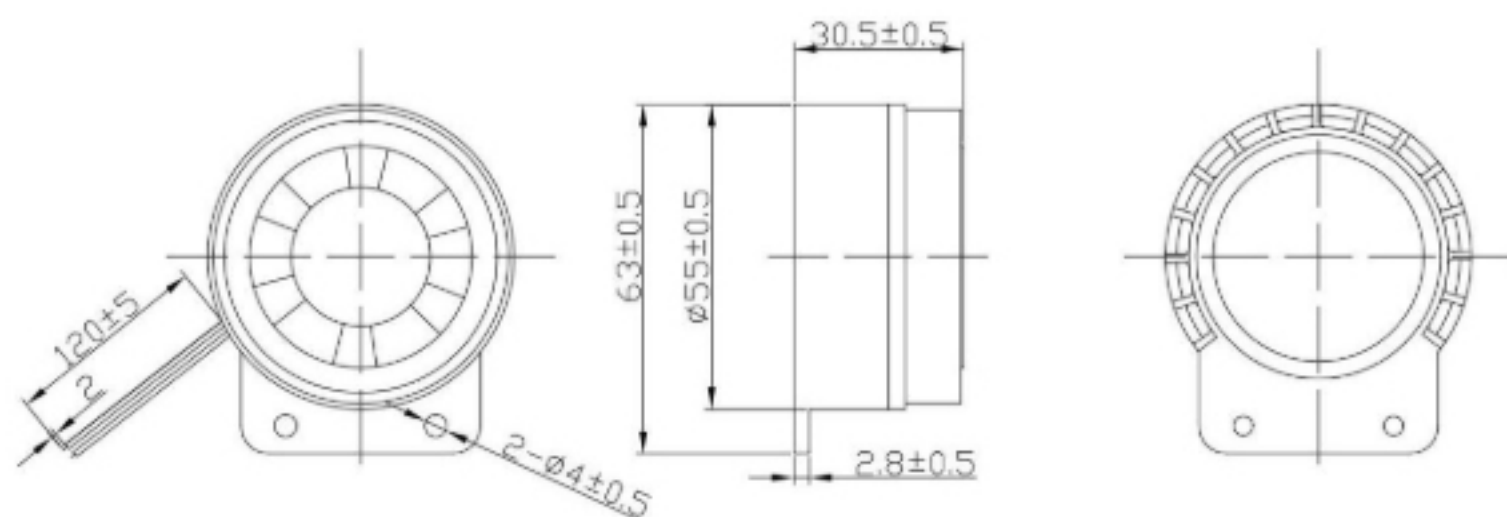

B: SPECIFICATIONS

Model NO	GPD5330L
Rated Voltage	9/12/24VDC
Operating Voltage	9-26VDC
Max.Rated Current	Max.80mA
Sound Pressure level(dB/min) at 10cm	Min. ≥ 100 dB
Resonant Frequency	3000 ± 500 Hz
Operating Temperature	-70 °C ~ +60 °C
Storage Temperature	-30 °C ~ +70 °C
Case material and color	ABS / Black

Measuring condition

Part shall be measured under a condition (Temperature: 5 ~ 35°C, Humidity: 45% ~ 85%R.H., Atmospheric pressure: 860 ~ 1060hPa) unless the standard condition (Temperature: 25 $\pm$ 3°C, Humidity: 60 $\pm$ 10%R.H. Atmospheric pressure: 860 ~ 1060hPa) is regulated to measure.