


Specification

(Test Condition, 25℃)

1. Housing Material/ Color..... ABS / Black
2. Rated Voltage 12VDC
3. Range Voltage 8~15 VDC
4. S.P.L. min. 105dB(at 1 meter, 12VDC)
5. Current Draw 280 mA Max.(at 12 VDC)
6. Tone Nature Siren
7. Load Test 8 Hours (at 12 VDC)
8. Heat Test 8 Hours (at 60℃)
9. Operating Temperature range -20 ~ +65℃
10. Wires Connection Red +12V
..... Black GND
11. Weight 80 ±10 g

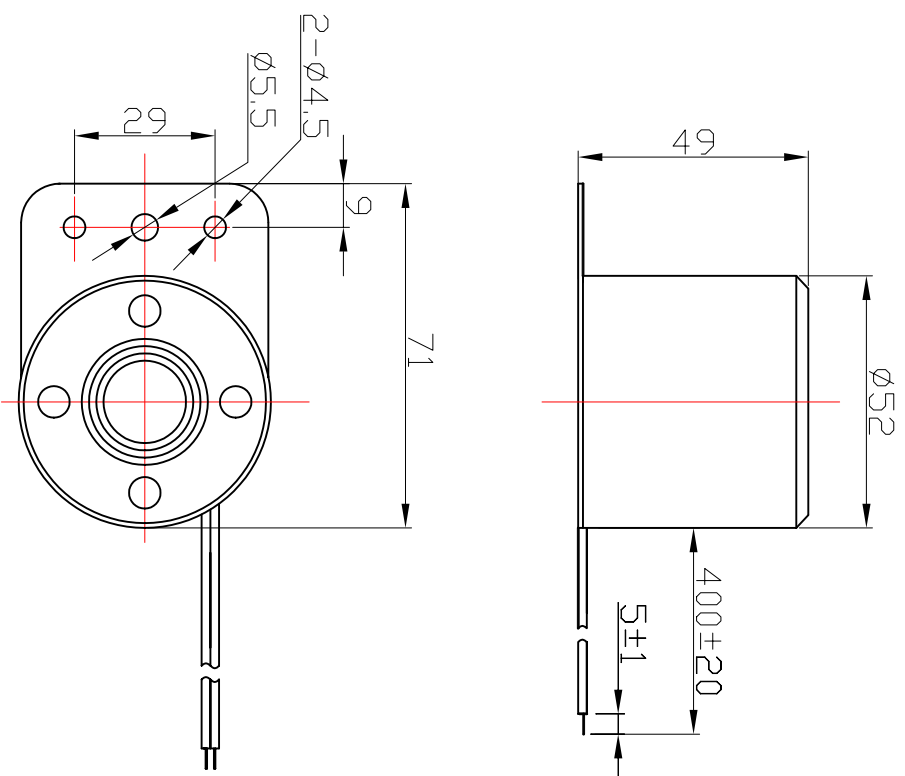

					KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com		
No.	DESCRIPTION	APPROVED	DATE	Piezo Siren KPS-5210			
TOLERANCES UNLESS NOTED OTHERWISE: mm ± ° ANGLES ±1°		APPROVALS	DATE				
X + XXX ±		DRAWN		UNIT	DWG NO.		
90° POKED ±1°		CHECKED		mm		KP3.840.410	
FIRST ANGLE PROJECTION		APPROVED	03.07.25	SCALE	NOT TO SCALE	SHEET	
						VER. 1.1	