

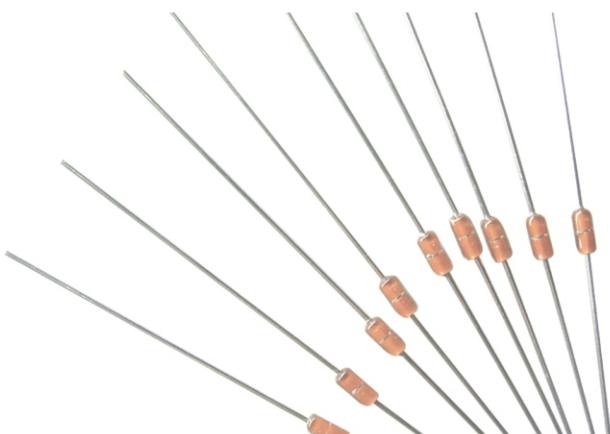


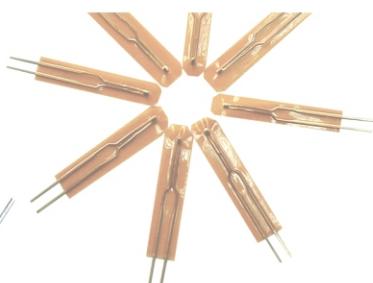

久尹股份有限公司
JOYIN CO., LTD.

NTC THERMISTOR JNR



www.joyin.com.tw

ISO 9001 IECQ



NTC Thermistors

QUALITY POLICY

品質政策

QUALITY RELIABLE & STABLE

CUSTOMER SECURE & DELIGHTFUL

品質穩定 客戶安心

CONTENTS

目 錄

Characteristics and function introduction 特性與功能介紹	01-05
Ordering code 料號系統	06
Dimension of components 尺寸規格	07
S series specification S 系列規格	08-17
Taping specification 編帶規格	18
Marking & packaging 打印及包裝	19
JD series specification JD 系列規格	20
JF series specification JF 系列規格	21
JT series specification JT 系列規格	22
JS series specification JS 系列規格	23
R/T Table R/T 對照表格	24
JSR series specification JSR 系列規格	25-27
Assembly series specification 組合系列規格	28



NTC THERMISTOR-INRUSH CURRENT LIMITING DEVICES

Joyin NTC Thermistor(JNR) devices are made of a specially formulated metal oxide ceramic material which is capable of suppressing high inrush current surges.

JNR devices, being of relatively high resistance, shall limit the inrush current for 1 ~ 2 seconds during which time the device decreased in resistance substantially to a point where its voltage drop is negligible. The devices are especially useful in power supplies (see FigA) because of the extremely low impedance of the capacitor being charged, of which the bridge is usually subjected to an exceedingly high current surge at turn-on point.

FEATURES

- High inrush current restriction effect.
- Small power loss in stationary state.
(Normally 1W or less than 50W power.)
- High thermal and electrical stability.
- Wide selection of electrical characteristics.

APPLICATION

As shown in Fig. B, the current surge can be eliminated by placing a NTC thermistor in series with a filament string. Yet, if the resistance of one NTC thermistor does not provide sufficient inrush current limiting functions for your application, two or more may be used in series or in separate legs of the supply circuit(Fig. A). Be noticed, the thermistor can not be used in parallel since one unit will tend to conduct nearly all the current available. Thus, JNR thermistor may be used in the AC(point A1 or A2) or the DC(point D1 or D2) locations in the circuit.(See Fig. A)

The resistance of NTC thermistor is designed higher than the total resistance of filaments when the circuit is turned on.

As current begins flowing, the thermistor shall immediately "self-heat". Then, in 1 ~ 2 seconds, its resistance will be reduced to a minimum and become insignificant to the total resistance of a circuit. With the same concept, current surges in electric motors can be held to minimum. Fig. C shows a typical DC motor's turn on surge before and after the application of a JNR thermistor to the circuit.

NTC熱敏電阻-突流限制元件

久尹的NTC熱敏電阻器(定名為JNR)係由特殊配製的金屬氧化物陶瓷材料製成,它可用來抑制高的突波電流。相對於受保護電路,JNR熱敏電阻器具有較高的電阻;因此會抑制突波電流約1~2秒,在這一段時間內JNR的電阻將因溫度升高而下降,直至熱敏電阻兩端壓降到可被忽略的電阻值為止。如圖A以電源供應器為例,在電源開的瞬間,電容器一般阻抗極低,橋式整流器通常承受很大的電流,故JNR熱敏電阻器特別適用於保護電源供應器。

特質

- 有效抑制突波電流。
- 穩定狀態下功率損耗極小(通常僅有1W或小於50W)。
- 热及電特性穩定性高。
- 寬廣的電性規格可供選擇。

應用概述

如圖B所示,將一NTC熱敏電阻與一白熱燈絲串聯時,可以消除突波電流。若一只NTC熱敏電阻無法提供足夠之突流限制功能時,二只或更多的熱敏電阻可用於串聯電路上或供應電路的各個分路上(如圖A)。但要注意的是NTC熱敏電阻,不可並聯於電路上,因為其中一只NTC就可能會傳導幾乎所有的電流。JNR熱敏電阻最好用於圖A所示AC電路的A1或A2處,或是DC電路D1或D2處。

在設計上,當電路剛被打開的瞬間,NTC熱敏電阻的阻值高於電路上所有白熱燈絲的總電阻值。當電流開始通過時,熱敏電阻隨即產生「自熱」現象,並在1到2秒內,阻值會降到幾可忽略。以同樣的構想來看電動馬達的突波電流,亦可以被抑制到最低限度。圖C表示應用JNR熱敏電阻保護直流水馬達前後突波電流波形的差異。

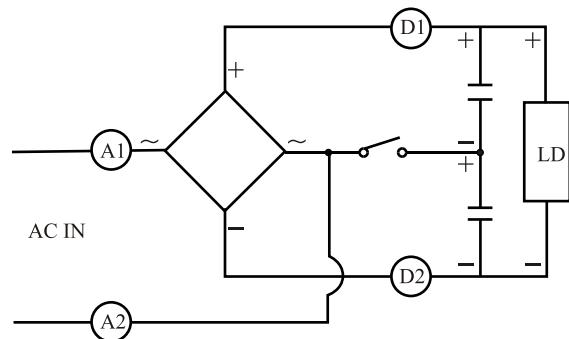


Fig.A

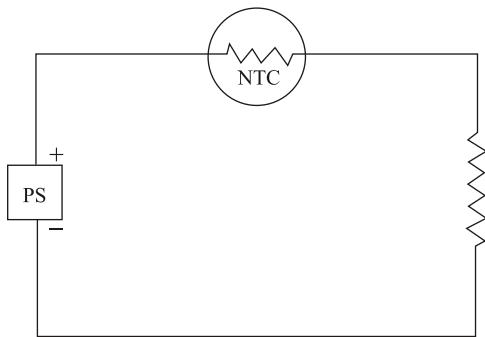


Fig.B

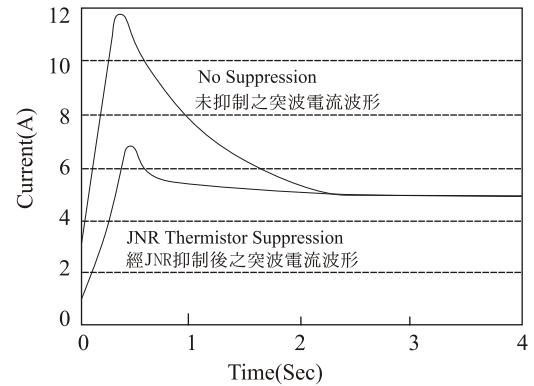


Fig.C

NTC THERMISTOR CHARACTERISTICS

To choose for application or take as referable parameters, the NTC thermistors are usually decided by the following three fundamental characteristics:

Temperature-Resistance Characteristic:


The resistance value of NTC thermistor is decreased while The ambient temperature or itself temperature is increased.
(See Fig.D)

NTC熱敏電阻之特性

應用上NTC元件的參數，通常由下列三種基本特性決定：

溫度-電阻特性：

當NTC熱敏電阻之環境溫度或它本身的溫度上升時，NTC的電阻值隨之減小(如圖D)。

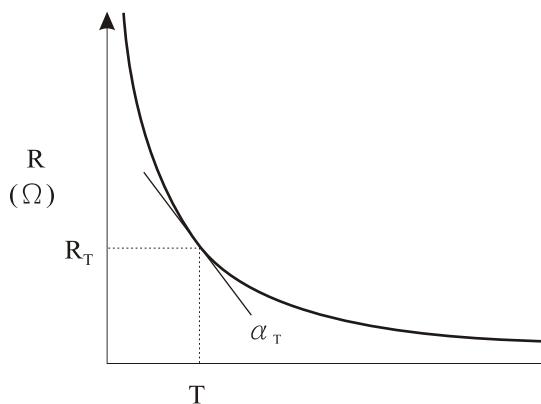

(如左圖D)

Fig.D

- Nominal resistance at 25°C (Ω) R_{25}
- Zero-power resistance (Ω) R_T
- Tolerance on the resistance nominal
 $\Delta R_{25}/R_{25} = 15\%(\text{L}), 20\%(\text{M})$
- Material constant(Sensibility index)($^{\circ}\text{K}$) β
- Temperature coefficient of resistance(% / $^{\circ}\text{C}$) α_T

- 25°C 時之電阻值 (Ω) R_{25}
- 零功率電阻值 (Ω) R_T
- 電阻值之容許差
 $\Delta R_{25}/R_{25} = 15\%(\text{L}), 20\%(\text{M})$
- 材料常數(敏感度指數) ($^{\circ}\text{K}$) β
- 電阻溫度係數 (% / $^{\circ}\text{C}$) α_T

Voltage-Current Characteristic:

When operating in small current (see fig.E), due to very low power is unable to make the NTC thermistor self-heated, so its resistance value is thus maintained constant and displayed with a linear curve (in conformity with ohm-law $V/R=I$). if the current is increased, the NTC thermistor will follow Joule-efficiency ($P=V \times I$) and make itself self-heated that results in a resistance value decreasing and thus displays with a status of "voltage descending while current increased."

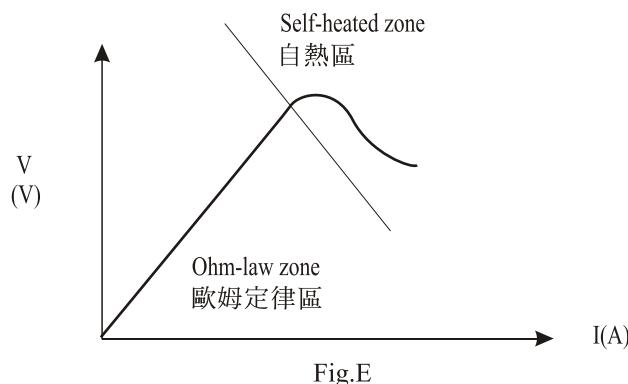


Fig.E

- Thermal dissipation coefficient($\text{mW}/\text{°C}$) δ
- Maximum steady-state current(A) I_{\max} .
- Resistance at maximum current(Ω) $R_{I_{\max}}$.

Temperature-Time Characteristic:

As shown in Fig. F which explains the time needed to reach the thermal equilibrium of NTC components with the environment. This characteristic depends on two important parameters. If a step change in temperature is applied to a component e.g. from high(T_1) to low(T_0) temperature, the energy lost ($\delta (T-T_0)dt$) by the component(- HdT) is equal to the energy dissipated by it. $-HdT = \delta (T-T_0)dt$

This equation yields: $T-T_1=(T_0-T_1) \times e^{-t/\tau}$, $\tau=H/\delta$

電壓-電流特性：

當NTC熱敏電阻在小電流下工作時(如圖E)，由於功率太低，其電阻值保持固定而表現線性關係(符合歐姆定律 $V/R=I$)。如果電流增加，NTC熱敏電阻就會產生焦耳效應($P=V \times I$)而使自己發熱，其電阻值隨即減小表現「電流增加，電壓下降」的狀態。

(如左圖E)

熱散逸係數($\text{mW}/\text{°C}$) δ 最大穩定電流(A) I_{\max} .最大電流時之電阻(Ω) $R_{I_{\max}}$.**溫度-時間特性：**

(如圖F)，說明NTC元件與環境達成熱平衡所需的時間，主要決定於材料熱容量(H)及散熱係數(δ)。當元件溫度由 T_1 降到 T_0 ，則可得到下列平衡式：

$$-HdT = \delta (T-T_0)dt \quad \text{其中 } -HdT = \text{元件熱損失}$$

$\delta (T-T_0)dt : \text{元件散熱量}$

積分後可得溫度與時間關係式 $T-T_1=(T_0-T_1) \times e^{-t/\tau}$

其中 $\tau=H/\delta$

Temp.(°C) 溫度(°C)

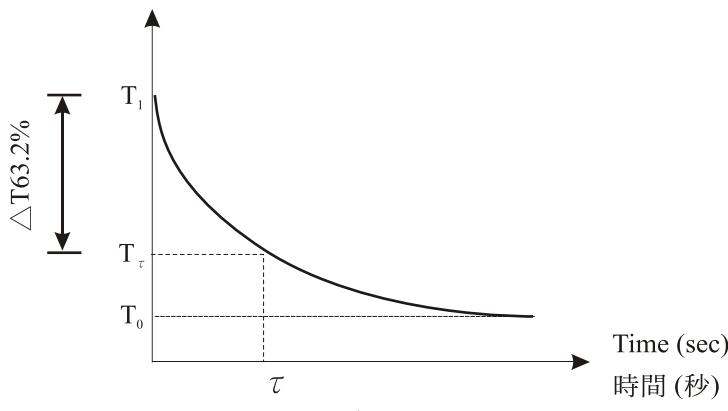



Fig.F

(如左圖F)



DERATING CURVE OF SURGE CURRENT LIMITING THERMISTOR

The maximum power of thermistor will decrease with the change of ambient temperature.
(See Fig.G)

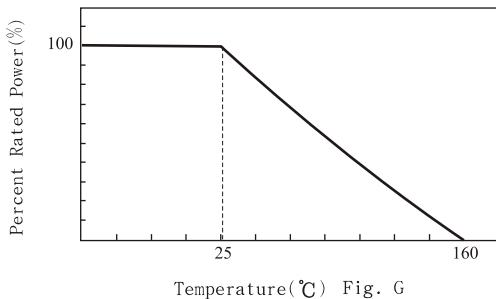

Temperature (°C) Fig. G

PARAMETERS DEFINITION

Thermistor

A thermistor is a thermally sensitive resistor of which its primary function is to exhibit a change in resistance accompanying with a change in itself temperature.

Negative Temperature Coefficient (NTC) Thermistor

NTC thermistor is a thermistor of which the zero-power resistance decreases while its temperature is increased.

Inrush current

Inrush current is the initial surge of current that results when power is firstly applied to a load having a low starting impedance, such as a discharged capacitor, a cold lamp filament, or a stopped motor, etc.

Inrush current limiter

Specially designed and constructed NTC thermistor may be used as an inrush current limiter. JOYIN inrush current limiter(JNR) is available in a wide range of current handling and zero-power resistance value combinations.

Zero-power resistance(R_0)

The zero-power resistance is the direct current resistance value of a thermistor measured at a specified temperature "T" with a power dissipation by the thermistor low enough that any further decrease in power will result in less than 0.1 percent change in resistance.

Maximum steady-state current($I_{max.}$)


The maximum steady-state current is the rating of the maximum current, normally expressed in amperes(A), allowable to be conducted by an inrush limiting NTC thermistor for an extended period of time.

Resistance at maximum current($R_{I_{max.}}$)

The resistance at maximum current is the approximate resistance of an inrush current limiting thermistor, expressed in ohms(Ω), when it is conducting its rated maximum Steady-state current.

熱敏電阻的遞減曲線

熱敏電阻之最大電功率將隨其周邊溫度之變化而遞減。
(如圖G)

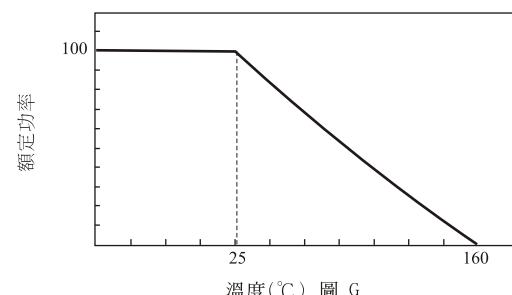

溫度(°C) 圖 G

參數定義

熱敏電阻

熱敏電阻是一種對熱敏感的電阻器，其電阻值隨元件本身溫度變化而改變。

負溫度係數(NTC)熱敏電阻

NTC熱敏電阻是零功率電阻隨本身溫度上升而下降的電阻。

突波電流(衝擊電流)

譬如已放電的電容器，已冷卻的燈絲，或者一個靜止的馬達等等。有極低的起始阻抗，當負載的初期有較高的初始電流稱為衝擊電流。

突波電流抑制器

經過特殊設計和製造的NTC熱敏電阻就是一種突波電流抑制器。久尹製造的突波電流抑制器(JNR)有寬廣的電流及零功率電阻範圍可供搭配選擇。

零功率電阻(R_0)

在特定溫度(T)下，熱敏電阻所消耗之功率極低時所量到的直流電阻值。該電功率消耗低到如果電功率的再次下降，電阻值變化率仍小於0.1%。

最大穩定電流($I_{max.}$)

NTC熱敏電阻能允許長時間通過的最大電流值，通常以安培(A)表示。

最大電流電阻($R_{I_{max.}}$)

NTC熱敏電阻通過額定最大穩定電流時的殘餘電阻，以歐姆(Ω)表示。

**Thermal dissipation coefficient(δ)**

The thermal dissipation coefficient is the ratio, normally expressed in milliwatts per degree C(mW/°C), at a specified ambient temperature, of a change in power dissipation in a thermistor to the resultant body temperature change. ($\delta=V \times I / \Delta T$)

Thermal time Constant (τ)

The thermal time constant is the time required for a thermistor to change 63.2 percent of total difference between its initial and final body temperature when subjected to a step function change in ambient temperature under zero-power condition and is normally expressed in second.

Material constant(β)

The material constant of a NTC thermistor is a measure of its resistance at one temperature compared to its resistance at a different temperature. Its value may be calculated by the formula shown below and is expressed in degrees kelvin (°K). The reference temperature used in this formula for determining material constant rating of JOYIN thermistor is 298.15°K and 323.15°K $\beta = \ln(R_1/R_2) / (\frac{1}{T_1} - \frac{1}{T_2})$

Temperature coefficient of resistance(α_T)

The temperature coefficient of resistance is the ratio at a specified temperature T , of the rate of change of zero-power resistance with temperature to the zero-power resistance of the thermistor. The temperature coefficient is commonly expressed in percent per degree C(%/°C). $\alpha = 1/R \frac{dR}{dT}$

Surge energy:

Surge energy is the maximum energy of pulses. The thermistor is capable of tolerating surge energy more than 1000 times with the resistance changing rate within $\pm 10\%$. This energy varies with voltage and capacitance.

Storage temperature range:-40 to +125°C

Operating temperature range:-30 to +125°C

WARNING

- The JNR thermistor shall not be touched by hand at the large power consumption for preventing burns.
- The JNR thermistor shall not be operated beyond the specified "Maximum Current" in the catalog.
- The JNR thermistor shall not be operated and stored under following environmental condition.
 - a. To be exposed directly to water or drop of water.
 - b. To be exposed directly to oil, gasoline or organic solvent and/or atmospheres of them.
 - c. Under condition of deoxidized or corrosive atmospheres such as chlorine, hydrogen sulfide, sulphur oxide and cracked gas from vinyl chloride.....etc.

熱散逸係數(δ)

在一特定的環境溫度下,熱敏電阻電功率消耗對本體溫度變化量的比值,通常以mW/°C表示。
($\delta=V \times I / \Delta T$)

熱時常數(τ)

在零功率條件下,熱敏電阻之溫度依照「步級函數」下降到其最初溫度與最終溫度差之63.2%時所需的時間,通常以秒數(Sec.)表示。參考(圖F)。

材料常數(β)

材料常數又稱貝他常數,即NTC熱敏電阻在某一溫度之電阻與另一溫度之電阻的比較值,可由下面的公式計算得到,並以卡氏溫度(°K)表示之。

久尹的材料常數是 $T_1=298.15^{\circ}\text{K}$, $T_2=323.15^{\circ}\text{K}$

$$\beta = \ln(R_1/R_2) / \left(\frac{1}{T_1} - \frac{1}{T_2} \right)$$

電阻之溫度係數(α_T)

熱敏電阻在某一特定溫度(T),零功率電阻對溫度變化率及零功率電阻之比值,通常以(%/°C)表示。

$$\alpha = 1/R \frac{dR}{dT}$$

突波能量

熱敏電阻能承受最少6000次而電阻變化率在 $\pm 20\%$ 以內之突波能量。此能量與所加之電壓及電容值有關。可經由V-I圖形積分而得。

儲存溫度:-40 to +125°C

操作溫度:-30 to +125°C

注意事項：

- JNR熱敏電阻在大功率工作時不可用手直接碰觸。
- JNR熱敏電阻不可在超過目錄最大電流情況下工作。
- JNR產品工作或儲存環境注意事項：
 - a. 產品不可與水接觸
 - b. 產品不可與油、揮發性油類、有機溶劑接觸或曝露在油、揮發性油類、有機溶劑之氣氛中。
 - c. 產品不可在氯化物、硫酸、爆炸性氣體.....等還原或腐蝕氣氛下工作或儲存。

**ORDERING CODE**

JNR	05	S	050	M	6	5	Y	AW
Joyin NTC Thermistor								
Element Size(disc dia.)								
05 = 5mm 08 = 8mm 10 = 10 mm 15 = 15mm	07 = 7mm 09 = 9mm 13 = 13mm 20 = 20mm							
Series								
S = Inrush current limiting								
Resistance of thermistor at 25°C								
0R7 = 0.7Ω 030 = 3Ω 070 = 7Ω 130 = 13Ω 200 = 20Ω 470 = 47Ω 221 = 220Ω	1R3 = 1.3Ω 040 = 4Ω 080 = 8Ω 150 = 15Ω 220 = 22Ω 500 = 50Ω	1R5 = 1.5Ω 050 = 5Ω 100 = 10Ω 160 = 16Ω 250 = 25Ω 800 = 80Ω	2R5 = 2.5Ω 060 = 6Ω 120 = 12Ω 180 = 18Ω 300 = 30Ω 121 = 120Ω					
Tolerance								
L = ± 15% M = ± 20%								
Lead Wire Diameter								
6 = 0.6 ± 0.05mm 8 = 0.8 ± 0.05mm 1 = 1.0 ± 0.05mm								

Lead Length & Packaging

U4 = 24mm min. for Bulk and Kink lead
U5 = 25mm min. for Bulk and Straight lead
AW= Ho 16mm for Ammo and Kink lead
AY = Ho 20mm for Ammo and Straight lead
RW= Ho 16mm for T/R and Kink lead
RY = Ho 20mm for T/R and Straight lead

* Special lead length & packaging per request.

Lead Style

Y=Vertical Kink Lead (standard)
P=Straight Lead

* Special lead styles per request

Lead Spacing


5=5.0mm
7=7.5mm
1=10mm



Dimension Table

unit:mm

Diameter	5mm	7mm	8mm	9mm	10mm	13mm	15mm	20mm
D max.	7.0	9.0	10.0	11.0	12.0	15.0	17.5	23.0
d \pm 0.05	0.6	0.6	0.6	0.6	0.8	0.8	0.8	1.0
F \pm 1.0	5.0	5.0	5.0	5.0	7.5	7.5	7.5	10.0
H max.	11.0	13.0	14.0	17.0	18.0	21.0	23.0	28.0
H1 max.	10.0	12.0	13.0	15.0	17.0	19.0	22.0	27.0
L1 min.	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
L min.	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0

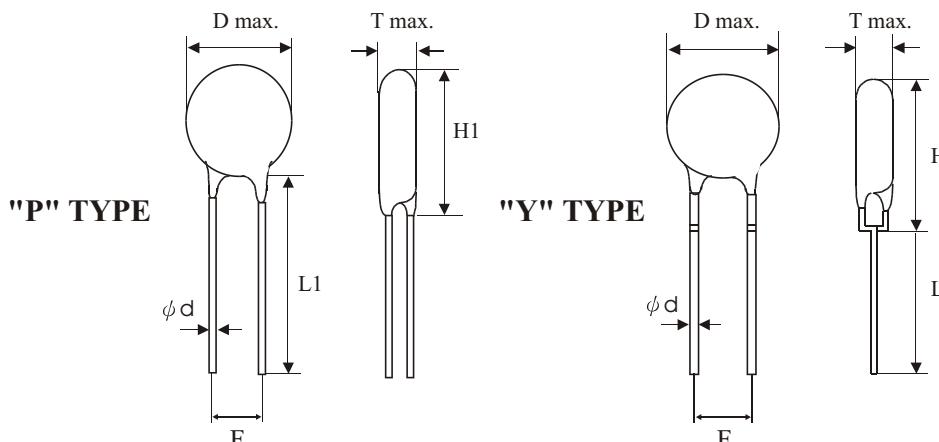

T max. Table(unit:mm)

Part No.	5mm	7mm	8mm	9mm	10mm	13mm	15mm	20mm
0R7M	---	---	---	---	---	---	---	6.0
1R3M	---	---	---	---	---	5.0	5.0	6.0
1R5M	---	---	---	---	---	---	5.0	---
2R5M	---	---	---	---	5.0	5.5	6.5	6.0
4R7M	---	---	4.5	---	---	---	---	---
030M	---	---	---	4.5	5.0	6.0	6.5	---
040M	---	---	4.5	---	5.5	---	5.5	---
050M	---	4.5	4.5	4.5	5.5	5.0	6.5	6.0
060L	---	---	4.5	---	6.0	5.0	7.0	6.0
070L	---	---	5.0	---	6.0	6.0	5.0	---
080L	---	4.5	5.5	5.5	7.0	6.5	5.0	---
100L	5.0	5.0	5.5	6.5	6.0	7.5	5.5	7.0
120L	---	5.0	---	5.5	7.0	5.5	5.5	7.5
130L	---	---	---	---	6.0	---	---	---
150L	---	---	5.0	---	7.0	5.5	6.0	---
160L	---	5.0	---	7.0	5.0	5.5	6.0	---
180L	---	---	5.0	---	---	6.0	6.5	---
200L	5.0	---	5.5	---	5.5	6.0	6.5	---
220L	---	5.5	5.5	7.0	---	---	---	---
250L	---	---	---	---	5.5	6.5	5.5	---
300L	---	6.0	---	---	6.0	---	5.5	---
400L	---	---	---	---	---	---	6.0	---
470L	---	---	---	---	6.5	---	6.5	---
500L	---	6.0	---	6.0	7.0	6.0	---	---
800L	---	---	---	---	6.0	---	5.5	---
121L	---	---	---	---	6.5	---	6.0	8.0
221L	---	---	---	---	---	---	7.0	---





JNR THERMISTOR SPECIFICATIONS

Ordering Code	Resistance at 25°C	Tolerance	I _{max}	R _{max}	Thermal dissipation coefficient	Thermal Time constant	Maximum Capacitance AC(μF)	Material constant B(±10%)	Certification
	(Ohms)		(Amps)	(Ω)	(mW/°C)	(sec.)	(240V)	(°K)	
JNR05S100L	10	±15%	1	0.848	12	50	47	2750	★
JNR05S200L	20	±15%	0.3	0.246	12	50	47	2750	★
JNR07S050M	5	±20%	3.0	0.171	10	45	47	2750	★
JNR07S080L	8	±15%	2.5	0.245	10	45	47	2750	★
JNR07S100L	10	±15%	2.3	0.298	11	45	68	2750	★
JNR07S120L	12	±15%	2.3	0.327	13	50	100	2750	★
JNR07S160L	16	±15%	2.0	0.516	13	50	100	2800	★
JNR07S220L	22	±15%	1.5	0.714	13	51	100	2800	★
JNR07S300L	30	±15%	1.5	0.771	13	51	100	2800	★
JNR07S500L	50	±15%	1.2	0.638	13	46	100	3100	★
JNR08S040M	4	±20%	2.0	0.274	13	42	100	2750	★
JNR08S4R7M	4.7	±20%	2.0	0.285	13	42	100	2750	★
JNR08S050M	5	±20%	2.0	0.348	16	55	100	2750	★
JNR08S060L	6	±15%	2.0	0.325	16	55	100	2750	★
JNR08S070L	7	±15%	2.0	0.387	16	44	100	2750	★
JNR08S080L	8	±15%	2.0	0.720	16	44	100	2750	★
JNR08S100L	10	±15%	2.0	0.357	12	44	100	2750	★
JNR08S150L	15	±15%	2.0	0.375	12	47	100	2850	★
JNR08S180L	18	±15%	2.0	0.442	12	47	100	2850	★
JNR08S200L	20	±15%	1.0	0.460	12	47	100	2850	★
JNR08S220L	22	±15%	1.0	1.238	12	57	100	2850	★
JNR09S030M	3	±20%	4.0	0.121	17	56	68	2750	★
JNR09S050M	5	±20%	3.8	0.143	17	63	68	2750	★
JNR09S080L	8	±15%	3.5	0.139	17	77	100	2750	★
JNR09S100L	10	±15%	3.0	0.172	17	88	100	2750	★
JNR09S120L	12	±15%	3.0	0.408	17	99	100	2800	★
JNR09S160L	16	±15%	2.5	0.359	17	103	100	2800	★
JNR09S220L	22	±15%	2.0	0.402	19	79	150	2850	★
JNR09S500L	50	±15%	1.4	0.392	17	66	150	3100	★
JNR10S2R5M	2.5	±20%	5.0	0.653	14	45	150	2750	★
JNR10S030M	3	±20%	4.0	0.103	15	45	150	2750	★
JNR10S040M	4	±20%	4.0	0.139	17	45	150	2750	★
JNR10S050M	5	±20%	4.0	0.153	17	80	150	2750	★
JNR10S060L	6	±15%	3.0	0.969	17	80	330	2750	★
JNR10S070L	7	±15%	3.0	0.258	18	80	330	2750	★
JNR10S080L	8	±15%	3.0	0.286	19	80	330	2750	★
JNR10S100L	10	±15%	3.0	0.298	19	86	330	2800	★
JNR10S120L	12	±15%	2.5	0.379	19	86	330	2800	★
JNR10S130L	13	±15%	2.5	0.406	19	88	330	2850	★
JNR10S150L	15	±15%	2.5	0.428	18	88	330	2850	★
JNR10S160L	16	±15%	2.5	0.283	18	57	330	3100	★
JNR10S200L	20	±15%	2.0	0.501	19	57	330	3100	★
JNR10S250L	25	±15%	2.0	0.517	19	57	330	3100	★
JNR10S300L	30	±15%	2.0	0.579	19	64	330	3100	★
JNR10S470L	47	±15%	2.0	0.691	20	70	330	3100	★
JNR10S500L	50	±15%	2.0	0.787	22	97	330	3100	★
JNR10S800L	80	±15%	1.0	1.928	17	66	390	3400	★
JNR10S121L	120	±15%	1.0	2.342	17	95	390	3400	★






JNR THERMISTOR SPECIFICATIONS

Ordering Code	Resistance at 25°C	Tolerance	I _{max}	R _{max}	Thermal dissipation coefficient	Thermal Time constant	Maximum Capacitance AC(μF)	Material constant B(±10%)	Certification
	(Ohms)		(Amps)	(Ω)	(mW/°C)	(sec.)	(240V)	(°K)	
JNR13S1R3M	1.3	±20%	7.0	0.048	19	68	47	2750	
JNR13S2R5M	2.5	±20%	5.0	0.098	21	92	68	2750	
JNR13S030M	3	±20%	5.0	0.106	22	95	68	2750	
JNR13S050M	5	±20%	5.0	0.083	22	110	100	2850	
JNR13S060L	6	±15%	5.0	0.157	22	110	150	2850	
JNR13S070L	7	±15%	4.0	0.287	22	110	330	2850	
JNR13S080L	8	±15%	4.0	0.306	22	110	330	2850	
JNR13S100L	10	±15%	4.0	0.126	22	110	330	2850	
JNR13S120L	12	±15%	3.0	0.267	18	75	390	3100	
JNR13S150L	15	±15%	3.0	0.338	18	82	560	3100	
JNR13S160L	16	±15%	3.0	0.310	18	82	560	3100	
JNR13S180L	18	±15%	2.8	0.372	22	82	470	3100	
JNR13S200L	20	±15%	2.8	0.340	22	82	470	3100	
JNR13S250L	25	±15%	2.0	0.664	22	94	560	3100	
JNR13S500L	50	±15%	2.0	0.201	22	94	560	3400	
JNR15S1R3M	1.3	±20%	8.0	0.047	23	94	47	2750	
JNR15S1R5M	1.5	±20%	8.0	0.049	23	94	100	2750	
JNR15S2R5M	2.5	±20%	8.0	0.062	23	112	150	2750	
JNR15S030M	3	±20%	7.0	0.082	23	150	330	2750	
JNR15S040M	4	±20%	6.0	0.112	24	110	330	2850	
JNR15S050M	5	±20%	6.0	0.111	25	110	390	2850	
JNR15S060L	6	±15%	5.0	0.137	25	114	390	2850	
JNR15S070L	7	±15%	5.0	0.117	19	72	470	3100	
JNR15S080L	8	±15%	5.0	0.126	21	76	470	3100	
JNR15S100L	10	±15%	5.0	0.140	21	96	560	3100	
JNR15S120L	12	±15%	4.0	0.206	21	100	560	3100	
JNR15S150L	15	±15%	4.0	0.224	21	120	680	3100	
JNR15S160L	16	±15%	4.0	0.219	26	120	680	3100	
JNR15S180L	18	±15%	4.0	0.244	26	125	680	3100	
JNR15S200L	20	±15%	4.0	0.248	26	125	680	3100	
JNR15S250L	25	±15%	3.0	0.321	19	84	680	3400	
JNR15S300L	30	±15%	3.0	0.349	24	97	680	3400	
JNR15S400L	40	±15%	3.0	0.398	25	99	1000	3400	
JNR15S470L	47	±15%	3.0	0.414	25	123	1000	3400	
JNR15S800L	80	±15%	2.5	0.492	25	94	680	3600	
JNR15S121L	120	±15%	2.0	0.906	25	97	1000	3600	
JNR15S221L	220	±15%	1.0	2.917	25	138	1500	3600	
JNR20S0R7M	0.7	±20%	12.0	0.037	29	118	470	2750	
JNR20S1R3M	1.3	±20%	8.0	0.057	31	157	470	2750	
JNR20S2R5M	2.5	±20%	8.0	0.080	31	98	330	2850	
JNR20S050M	5	±20%	7.0	0.095	31	90	390	3100	
JNR20S060L	6	±15%	6.0	0.120	31	118	470	3100	
JNR20S080L	8	±15%	6.0	0.119	31	130	470	3100	
JNR20S100L	10	±15%	6.0	0.130	37	152	560	3100	
JNR20S120L	12	±15%	5.0	0.214	37	210	680	3100	
JNR20S121L	120	±15%	2.0	2.993	22	215	1500	3600	

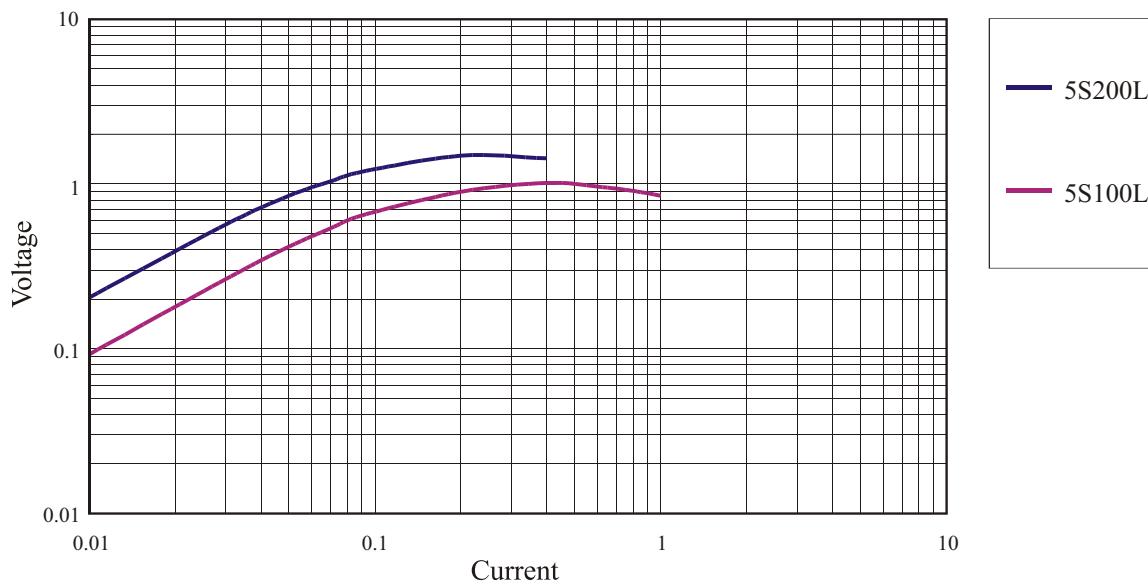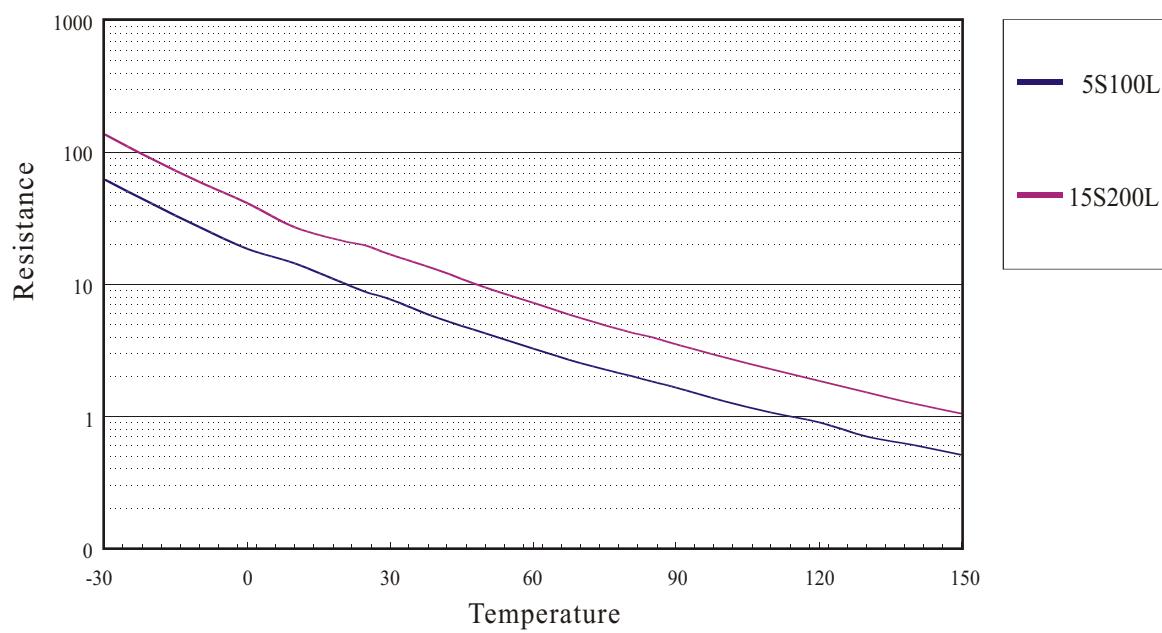**5mm****V-I Characteristics Chart****R-T Curve**


7mm

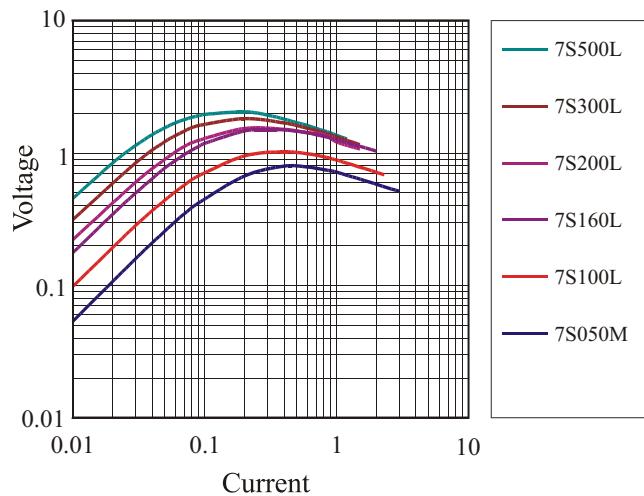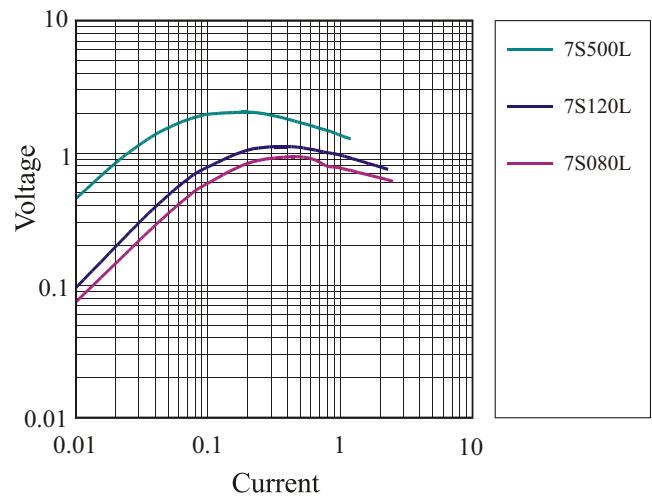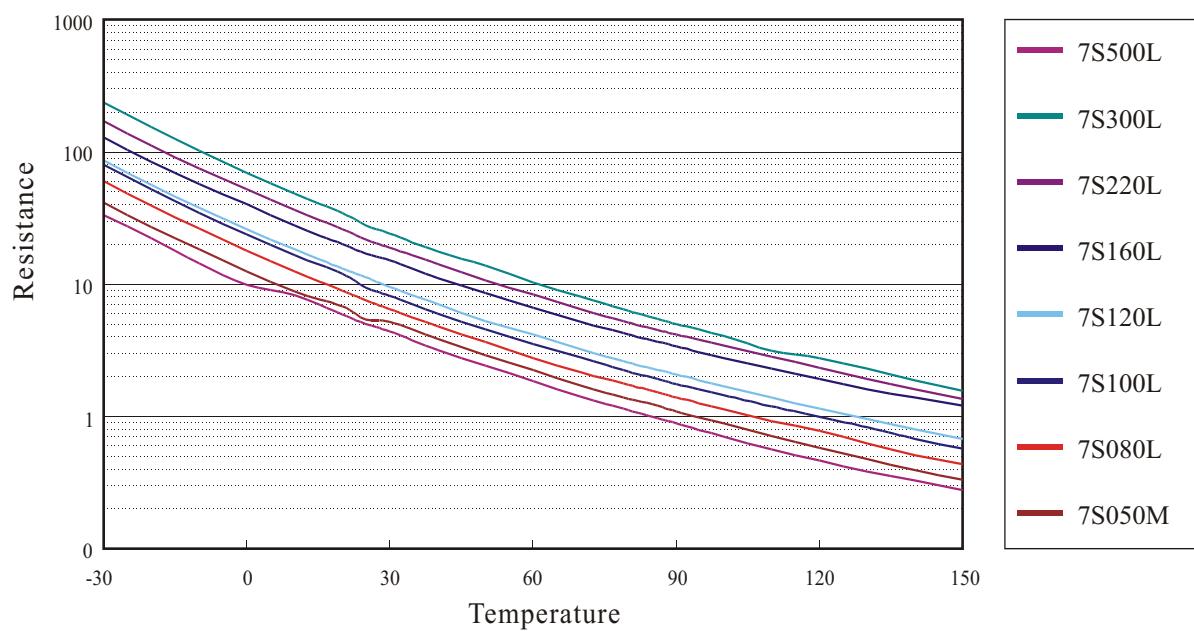V-I Characteristics Chart**V-I Characteristics Chart****R-T Curve**




8mm


V-I Characteristics Chart



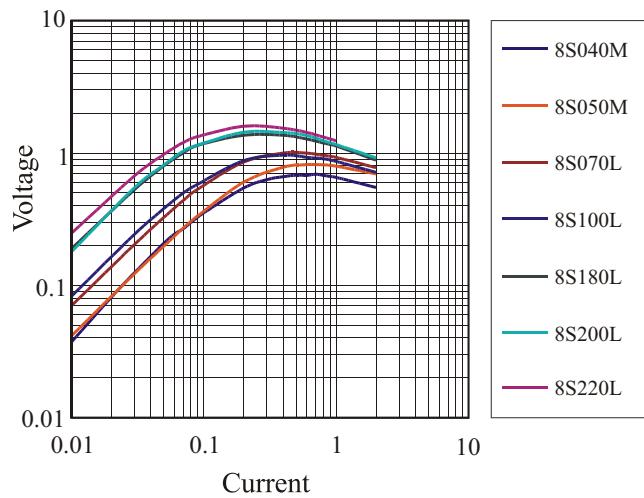


V-I Characteristics Chart

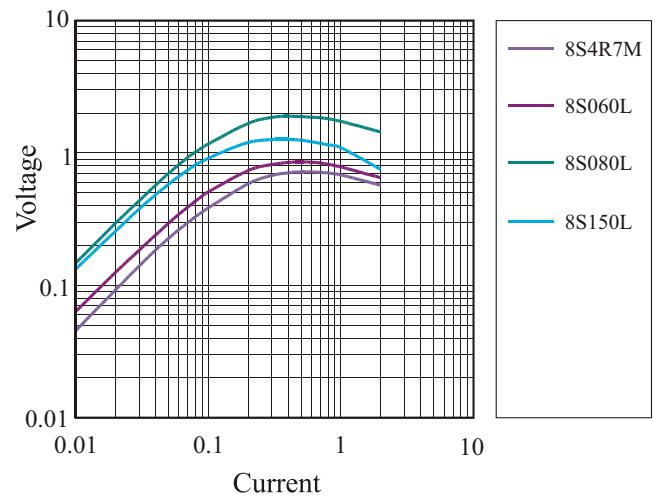

R-T Curve

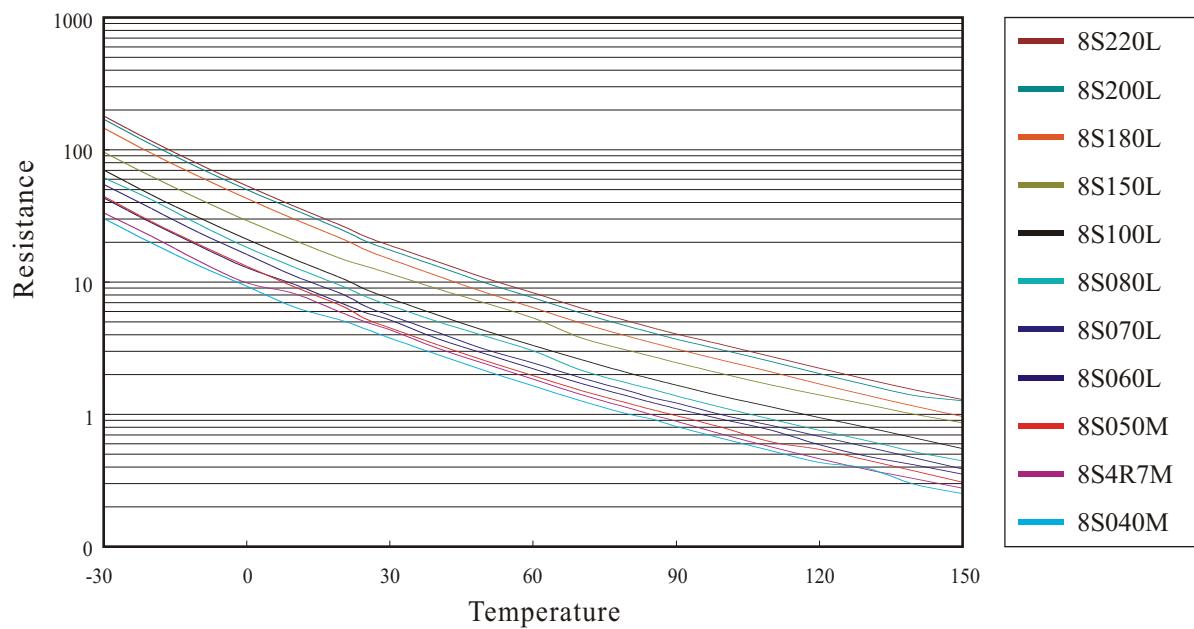


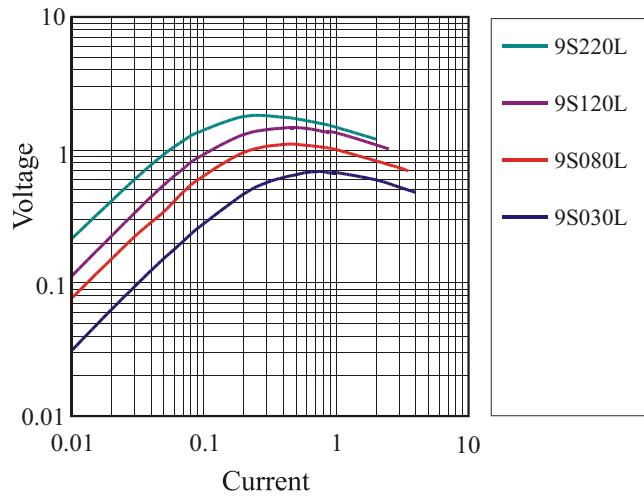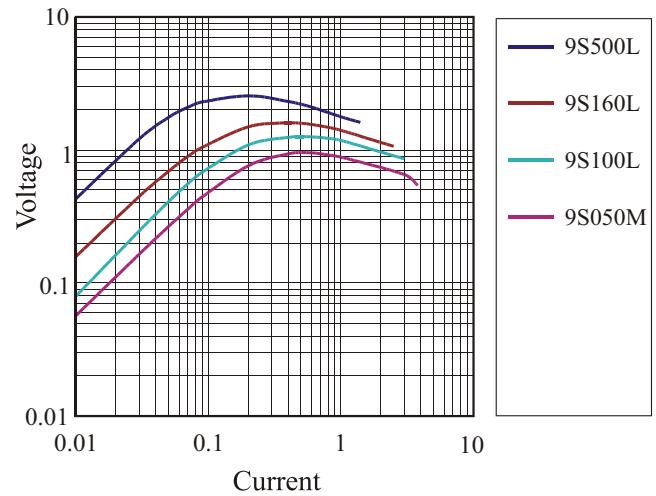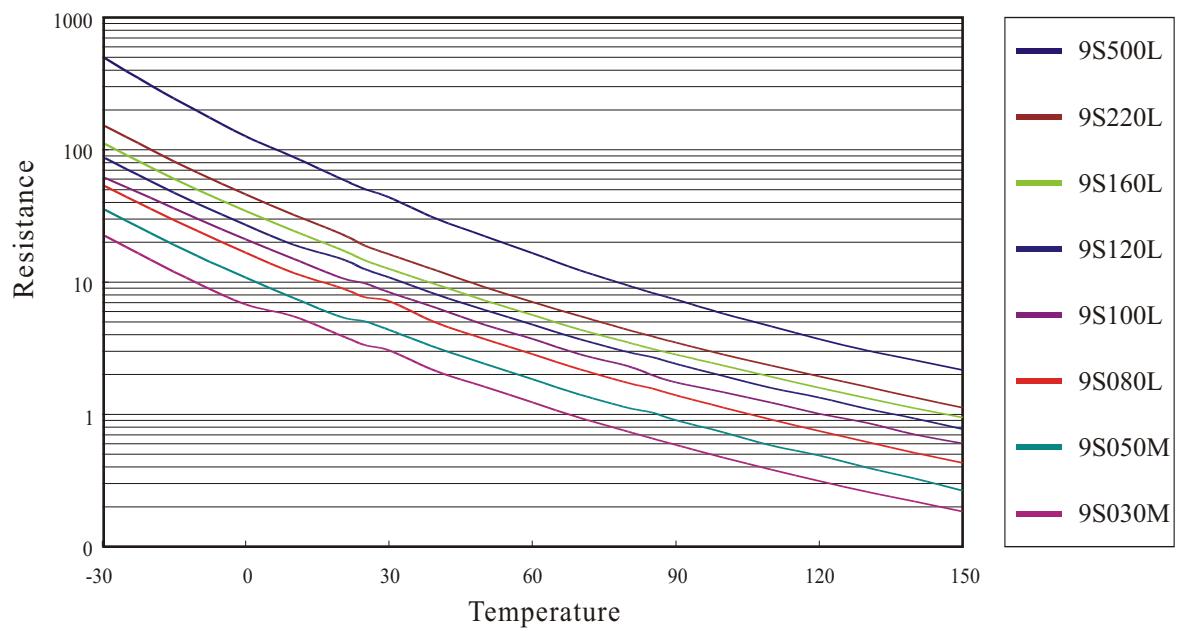9mm**V-I Characteristics Chart****V-I Characteristics Chart****R-T Curve**




10mm


V-I Characteristics Chart



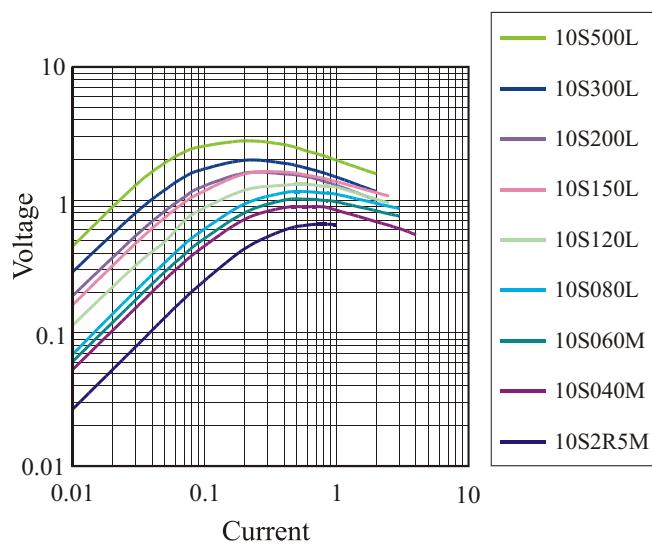





V-I Characteristics Chart

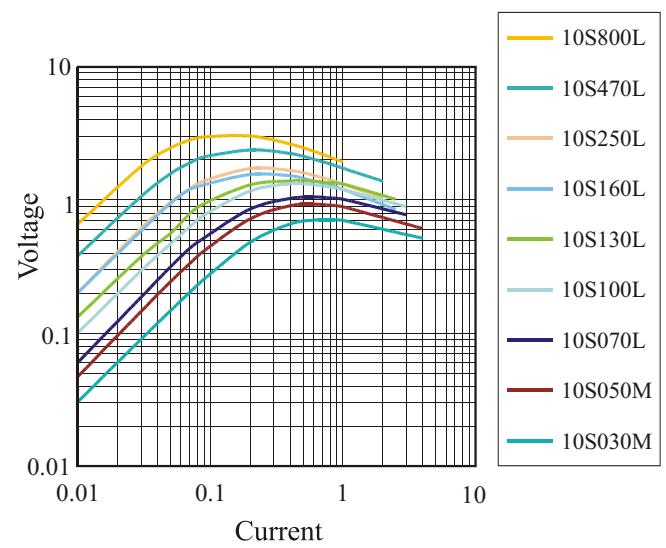

R-T Curve

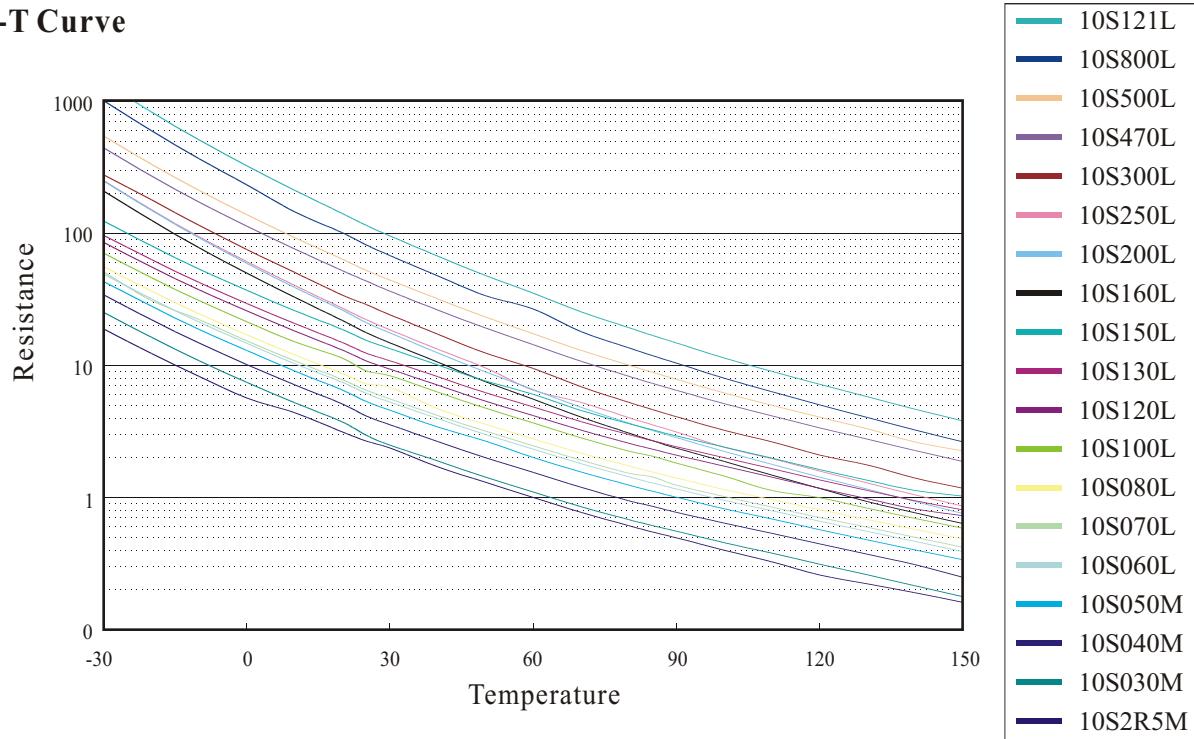

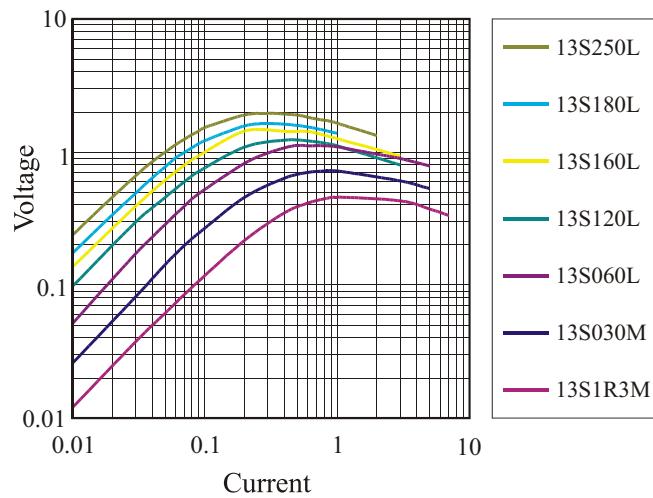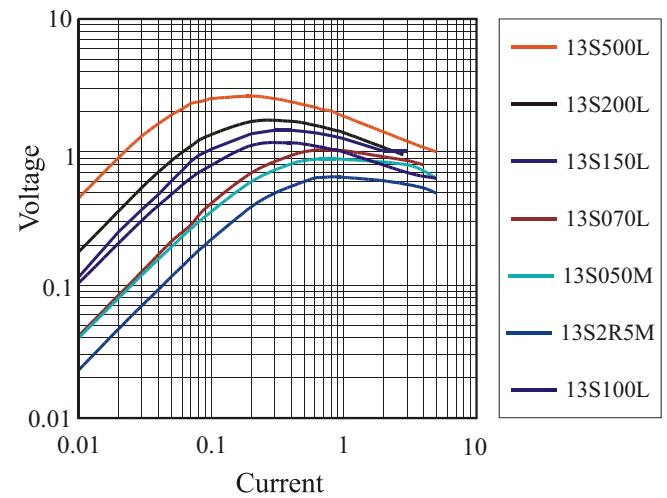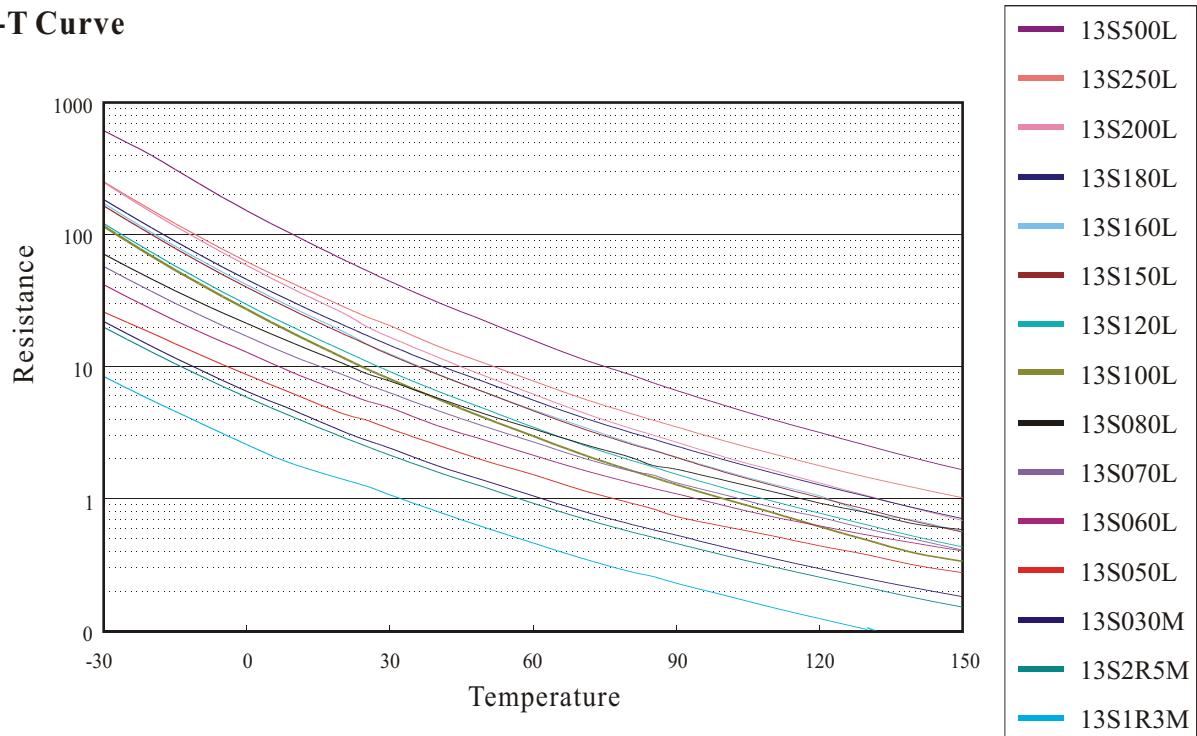
13mm**V-I Characteristics Chart****V-I Characteristics Chart****R-T Curve**

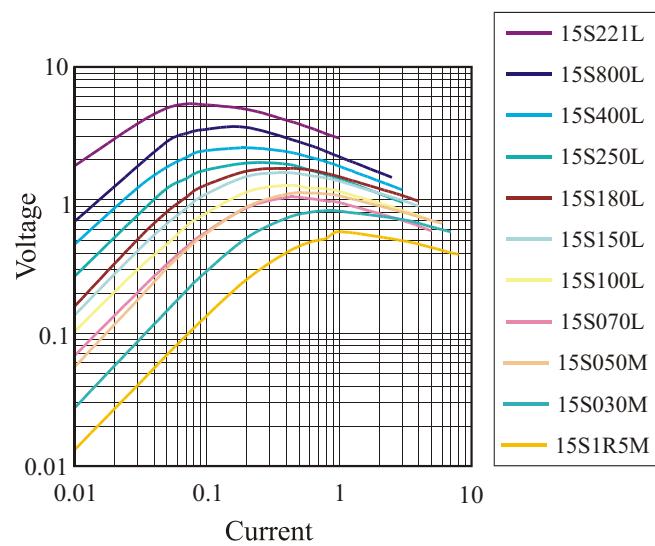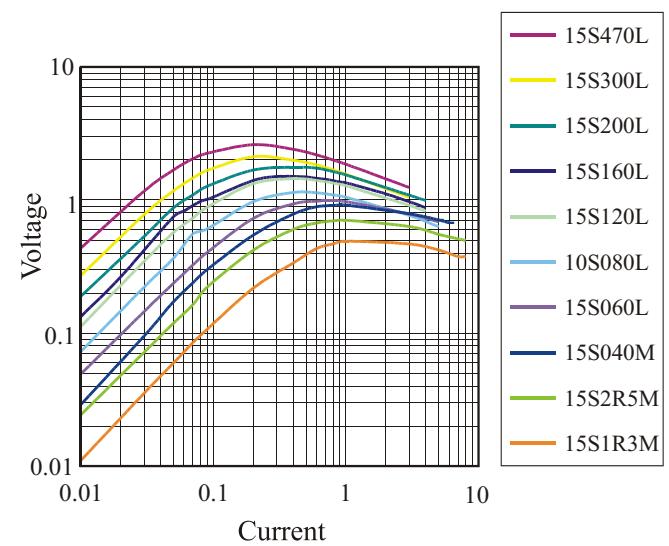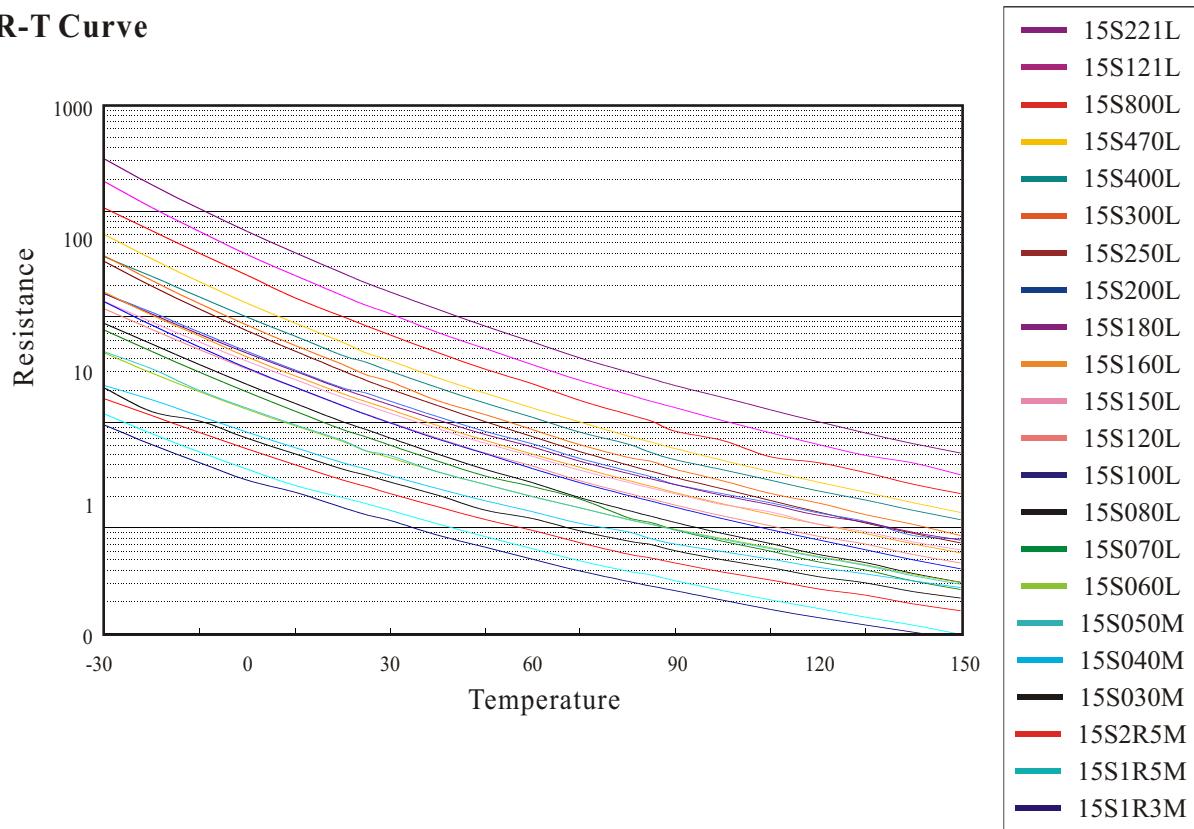**15mm****V-I Characteristics Chart****V-I Characteristics Chart****R-T Curve**




20mm

V-I Characteristics Chart

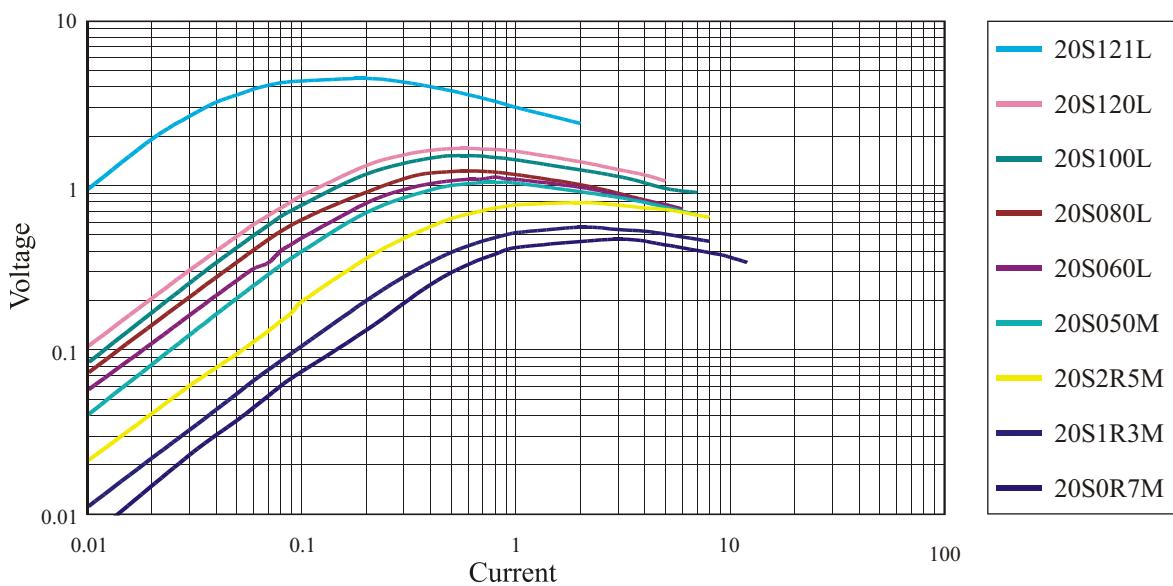



R-T Curve

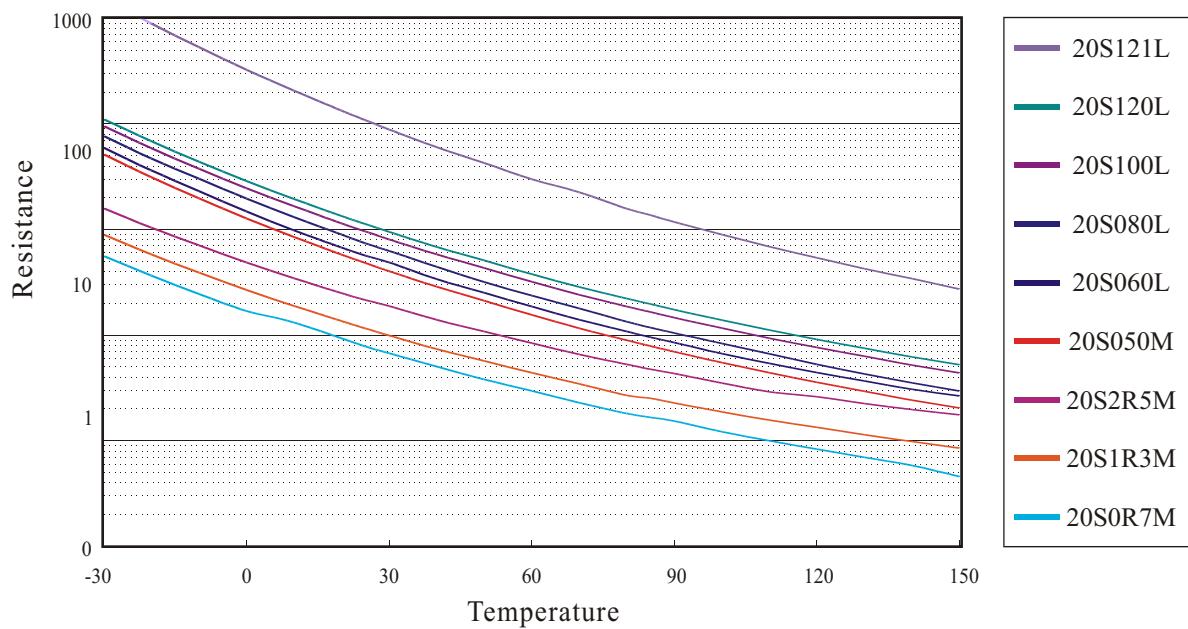




Tape and Reel Dimensions


1/2" pitch

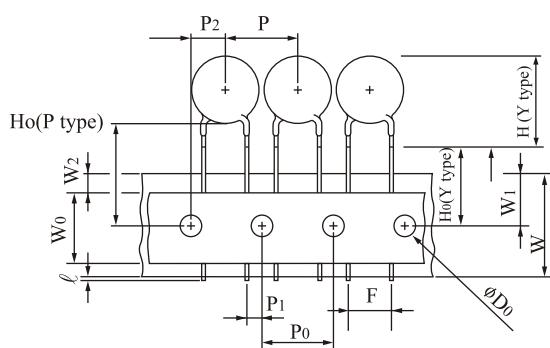


1.0" pitch

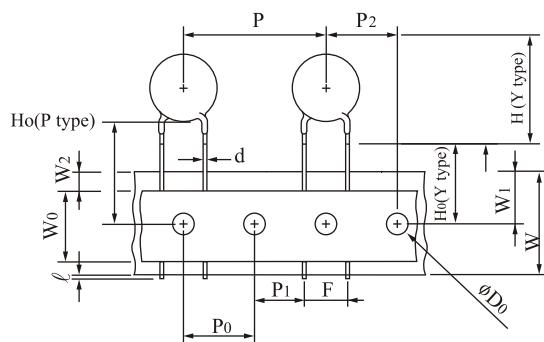

Symbols	Item	5/7/8/9/10mm	8/9/10/13/15/20mm	20mm
ℓ	Cut out length	1.1 mm max.	1.1 mm max.	
H (Y type)	Height of Top	See H max. table		
H ₀ (Y type)	Height to seating plane	16.0 ± 0.5 mm	16.0 ± 0.5 mm	
H ₀ (P type)	Height of component from hole center	16.0~21.0 mm	16.0~21.0 mm	
Δh	Front to back deviation	0 ± 2.0 mm	0 ± 2.0 mm	
W	Carrier tape width	18.0 $^{+1.0}_{-0.5}$ mm	18.0 $^{+1.0}_{-0.5}$ mm	
W ₀	Hold down tape width	10.0 mm	12.0 mm	
W ₁	Sprocket hole position	9.0 $^{+0.75}_{-0.5}$ mm	9.0 $^{+0.75}_{-0.5}$ mm	
W ₂	Adhesive tape position	3.0 mm max.	3.0 mm max.	
F	Component lead spacing	5.0 $^{+0.8}_{-0.2}$ mm	7.5 $^{+0.8}_{-0.2}$ mm	10.0 $^{+0.8}_{-0.2}$ mm
P	Pitch of component	12.7 ± 1.0 mm	25.4 ± 1.0 mm	
P ₀	Sprocket hole pitch	12.7 ± 0.3 mm	12.7 ± 0.3 mm	
P ₁	Lead length from hole center to lead	3.85 ± 0.7 mm	8.95 ± 0.7 mm	7.7 ± 0.7 mm
P ₂	Length from hole center to disk center	6.35 ± 1.3 mm	12.7 ± 1.3 mm	
D ₀	Sprocket hole diameter	4.0 ± 0.2 mm	4.0 ± 0.2 mm	
d	Lead wire diameter	0.6 ± 0.05 mm	0.8 ± 0.05 mm	1.0 ± 0.05 mm
T	Disk thickness	See T max. table	See T max. table	
t ₁	Total thickness tape	0.7 ± 0.05 mm	0.7 ± 0.05 mm	
t ₂	Total thickness	1.6 mm max.	1.8 mm max.	

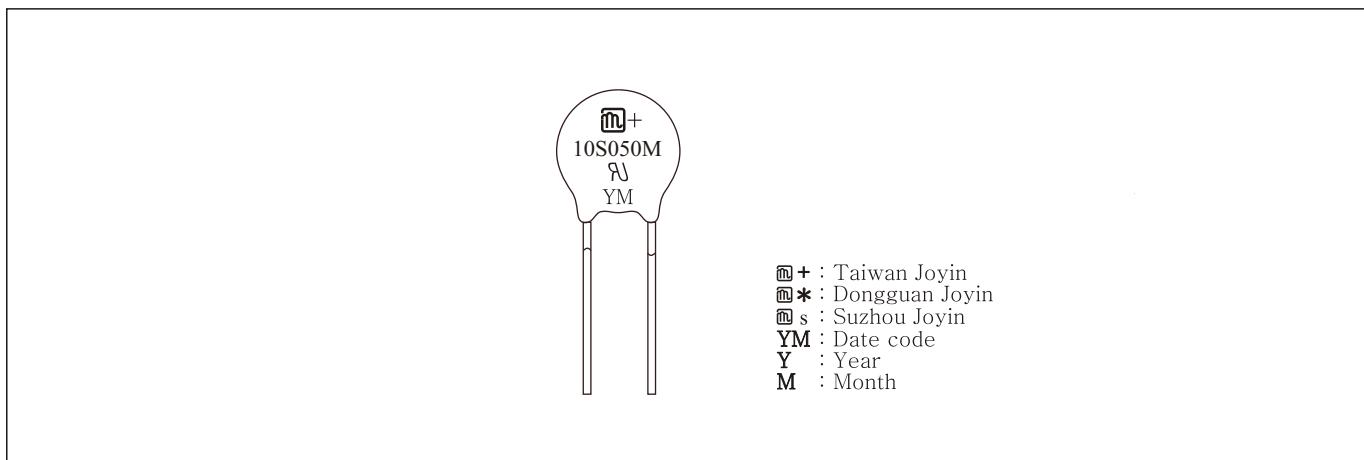**MARKING****PACKAGING**

in mm

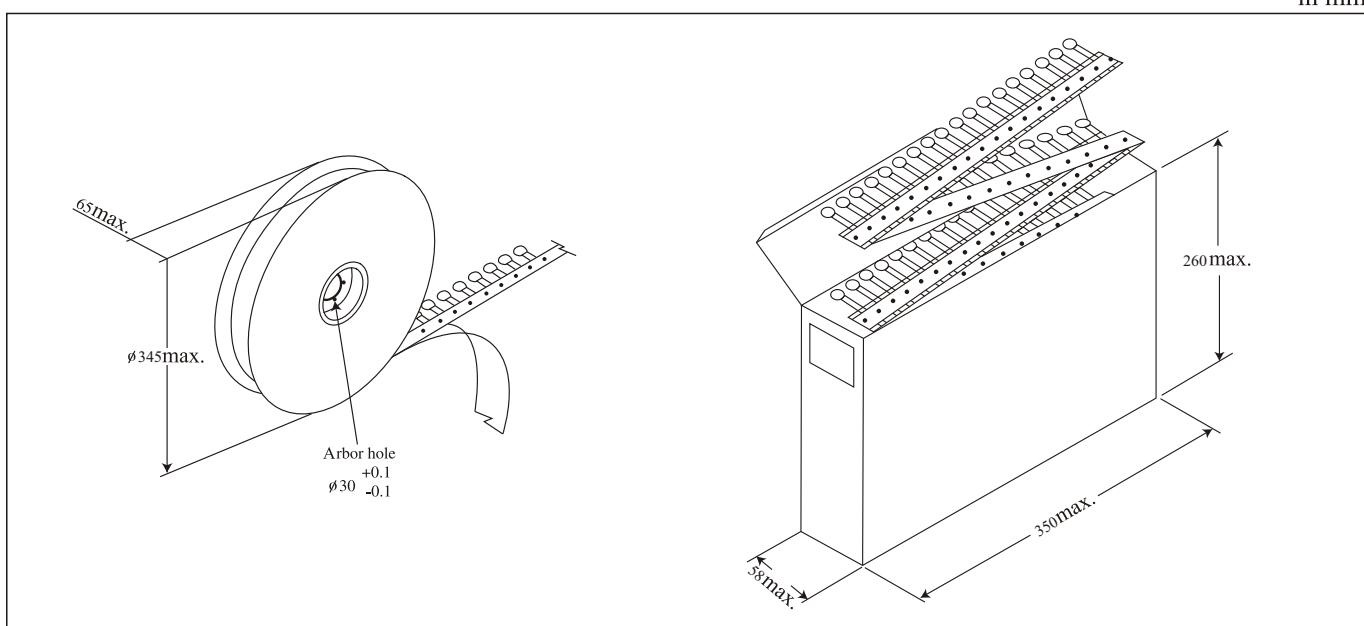**Quantity per Packing Unit**

Diameter Packaging \	5mm	7mm	8mm	9mm	10mm	13mm	15mm	20mm
Bulk (pcs/box)	5000	5000	4000	1250-2500	1250-2500	750-2000	750-1500	500-750
Reel	1500	1500	1500	750-1000	750-1000	750-1000	500-750	—
Ammo	1500	1500	1500	750-1000	750-1000	750-1000	—	—

Packaging	Bulk (box)	Reel	Reel (15mm, 20mm)	Ammo (5mm, 7mm)	Ammo (10mm,15mm) 180K-471K	Ammo (10mm,15mm) 511-751K	Ammo (20mm) 180K-471K
Box size (mm)	290x155x110	350x350x108	350x350x74	330x240x46	343x210x52	343x260x52	343x220x58
Carton size (mm)	310x328x250	371x371x590	370x370x468	350x500x270	363x440x250	363x540x250	363x460x250
One carton with	4 Boxes	5 Boxes (10 reels)	6 Boxes(6 reels)	10 Boxes	8 Boxes	8 Boxes	8 Boxes



SMALL SIZE NTC THERMISTOR

JD SERIES



Series **JD** **103**
R.value at 25°C

F **C**

R/T Code

Resistor Tolerance at 25°C

F=±1%, G=±2%, H=±3%, J=±5%

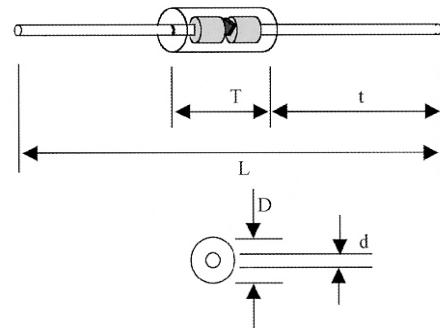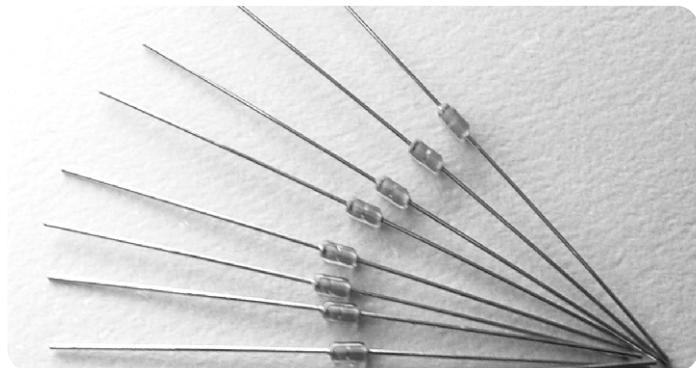

T=4.2mm Max.
t =27.0mm Max.
L=58.2mm Min.
D=2.0mm Max.
d =0.0mm Max.

Dissipation Constant	Min. 2.3m W/ °C in still air
Thermal Time Constant	Max. 15.0 sec in still air
Operating Temperature	-30 °C to +250 °C
Maximum Power Rating	10mW at 25 °C

Part No.	Resistance @25 °C(Ω)	Beta (K)		R/T Code
		0/50	25/85	
JD502_B1	5,000	3560	3620	B1
JD103_C	10,000	3689	3720	C
JD103_F	10,000	3880	3970	F
JD203_F ₁	20,000	3880	3970	F1
JD303_O	30,000	3880	3970	O
JD503_Q	50,000	3961	4060	Q
JD104_P	100,000	4000	4200	P
JD204_I	200,000	4185	4391	I
JD145_L	1,388,000	4300	4815	L

SMALL SIZE NTC THERMISTOR



JF SERIES

Series JF 103
 R.value at 25°C

F U
 R/T Code

Resistor Tolerance at 25°C

F=±1%, G=±2%, H=±3%, J=±5%

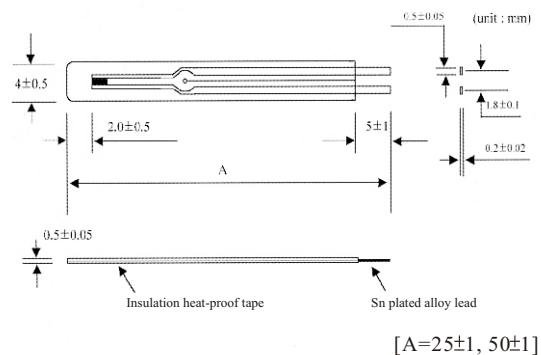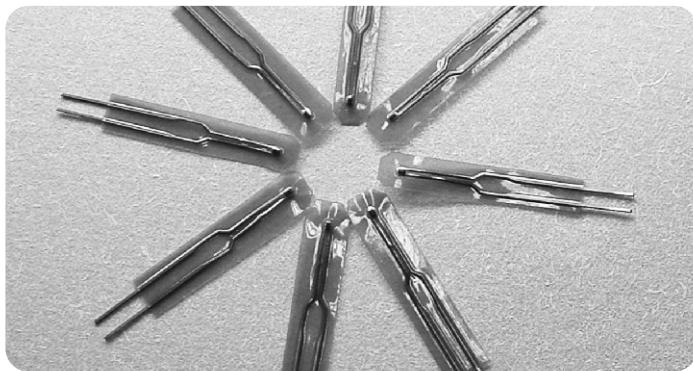

Dissipation Constant	Min. 0.7m W/ °C in still air
Thermal Time Constant	Max. 5.0 sec in still air
Operating Temperature	-30 °C to +100 °C
Maximum Power Rating	3.5mW at 25 °C

Part No.	Resistance @25 °C(Ω)	Beta (K)		R/T
		0/50	25/85	Code
JF103_U	10,000	3320	3435	U
JF503_F1	50,000	3880	3970	F1
JF104_O	100,000	3880	3970	O



SMALL SIZE NTC THERMISTOR


JT SERIES

Series JT
103
 R.value at 25°C

F U
 R/T Code

Resistor Tolerance at 25°C

F=±1%, G=±2%, H=±3%, J=±5%

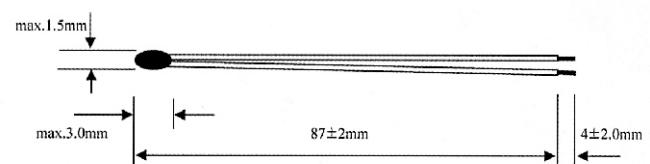

Dissipation Constant	Min. 0.7m W/ °C in still air
Thermal Time Constant	Max. 3.5 sec in still air
Operating Temperature	-30 °C to +100 °C
Maximum Power Rating	3.5mW at 25 °C



Part No.	Resistance @25 °C(Ω)	Beta (K)		R/T
		0/50	25/85	Code
JT103_U	10,000	3320	3435	U
JT303_O	30,000	3880	3970	O
JT503_Q	50,000	3961	4060	Q
JT833_O1	83,000	3886	4013	O1
JT104_P	100,000	4000	4200	P

SMALL SIZE NTC THERMISTOR

JS SERIES

Series **JS**
103
 R.value at 25°C

F **A**

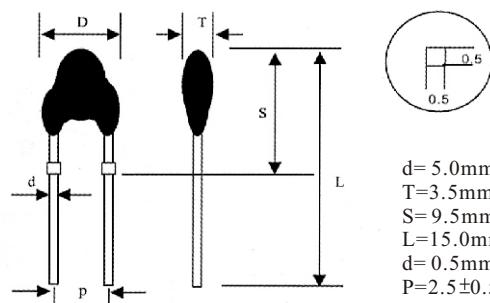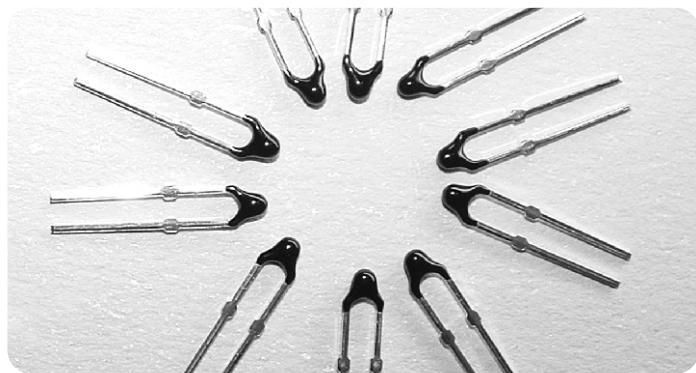R/T Code**Resistor Tolerance at 25°C****F=±1%, G=±2%, H=±3%, J=±5%**

d= 5.0mm Max
 T=3.5mm Max
 S= 9.5mm Max
 L=15.0mm Min
 d= 0.5mm Max
 P=2.5±0.5mm

Dissipation Constant	Min. 2.0m W/ °C in still air
Thermal Time Constant	Max. 15.0 sec in still air
Operating Temperature	-30°C to + 150 °C
Maximum Power Rating	10mW at 25°C

Part No.	Resistance @25 °C(Ω)	Beta (K)		R/T Code
		0/50	25/85	
JS202_A	2,000	3323	3424	A
JS502_R	5,000	3228	3324	R
JS502_B	5,000	3431	3500	B
JS502_F	5,000	3880	3970	F
JS103_U	10,000	3320	3435	U
JS103_C	10,000	3689	3720	C
JS103_F	10,000	3880	3970	F
JS203_F1	20,000	3880	3970	F1
JS303_O	30,000	3880	3970	O
JS503_Q	50,000	3961	4060	Q
JS104_P	100,000	4000	4200	P
JS204_I	200,000	4185	4391	I



SMALL SIZE NTC THERMISTOR

R/T TABLE



Temp.		R/T CODE														
°C	°F	A	B	B1	C	F	F1	I	L	O	O1	P	Q	R	U	W
-30	-22	11.327	12.586	13.982	15.755	17.600	17.600	19.355	14.242	17.600	16.922	17.661	18.033	10.489	11.088	20.247
-25	-13	8.782	9.618	10.553	11.706	12.983	12.983	14.330	11.342	12.983	12.594	31.164	13.304	8.202	8.633	14.668
-20	-4	6.860	7.415	8.041	8.791	9.672	9.672	10.677	8.977	9.672	9.451	9.879	9.906	6.459	6.768	10.747
-15	5	5.397	5.764	6.183	6.670	7.274	7.274	8.006	7.072	7.274	7.151	7.464	7.441	5.122	5.342	7.958
-10	14	4.277	4.517	4.795	5.110	5.520	5.520	6.041	5.552	5.520	5.454	5.677	5.637	4.089	4.243	5.953
-5	23	3.411	3.567	3.750	3.951	4.225	4.225	4.587	4.349	4.225	4.191	4.347	4.306	3.285	3.392	4.497
0	32	2.739	2.838	2.955	3.081	3.261	3.261	3.505	3.402	3.261	3.245	3.350	3.315	2.656	2.728	3.428
5	41	2.213	2.274	2.347	2.423	2.537	2.537	2.695	2.660	2.537	2.530	2.599	2.572	2.160	2.207	2.637
10	50	1.799	1.834	1.877	1.921	1.989	1.989	2.085	2.080	1.989	1.986	2.028	2.010	1.767	1.796	2.045
15	59	1.471	1.489	1.512	1.534	1.571	1.571	1.622	1.627	1.571	1.570	1.593	1.582	1.454	1.470	1.599
20	68	1.210	1.217	1.226	1.234	1.249	1.249	1.270	1.275	1.249	1.249	1.258	1.254	1.203	1.209	1.260
25	77	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
30	86	0.831	0.827	0.821	0.815	0.806	0.806	0.792	0.786	0.806	0.805	0.799	0.803	0.836	0.831	0.799
35	95	0.694	0.687	0.678	0.669	0.653	0.653	0.630	0.619	0.653	0.652	0.642	0.648	0.702	0.694	0.643
40	104	0.583	0.574	0.563	0.552	0.533	0.533	0.505	0.489	0.533	0.531	0.519	0.527	0.592	0.583	0.521
45	113	0.491	0.482	0.470	0.458	0.437	0.437	0.406	0.387	0.437	0.435	0.421	0.430	0.502	0.491	0.424
50	122	0.416	0.407	0.394	0.383	0.361	0.361	0.328	0.308	0.361	0.358	0.344	0.353	0.427	0.416	0.348
55	131	0.354	0.345	0.332	0.321	0.299	0.299	0.267	0.245	0.299	0.297	0.282	0.292	0.365	0.354	0.287
60	140	0.303	0.294	0.281	0.271	0.249	0.249	0.218	0.196	0.249	0.247	0.232	0.242	0.313	0.302	0.238
65	149	0.260	0.251	0.239	0.229	0.209	0.209	0.179	0.157	0.209	0.206	0.192	0.202	0.270	0.259	0.198
70	158	0.224	0.216	0.205	0.195	0.176	0.176	0.147	0.126	0.176	0.173	0.160	0.169	0.234	0.223	0.166
75	167	0.193	0.186	0.176	0.167	0.148	0.148	0.122	0.102	0.148	0.146	0.134	0.142	0.203	0.192	0.140
80	176	0.168	0.161	0.151	0.143	0.126	0.126	0.102	0.082	0.126	0.123	0.112	0.120	0.177	0.167	0.118
85	185	0.146	0.140	0.131	0.124	0.107	0.107	0.085	0.067	0.107	0.105	0.094	0.102	0.154	0.145	0.100
90	194	0.128	0.122	0.114	0.107	0.092	0.092	0.071	0.054	0.092	0.089	0.080	0.087	0.135	0.127	0.085
95	203	0.112	0.107	0.099	0.093	0.079	0.079	0.060	0.045	0.079	0.077	0.068	0.074	0.119	0.111	0.073
100	212	0.098	0.094	0.087	0.081	0.068	0.068	0.051	0.037	0.068	0.066	0.058	0.064	0.105	0.097	0.063
105	221	0.087	0.083	0.076	0.071	0.059	0.059	0.043	0.030	0.059	0.057	0.049	0.055	0.093	0.086	0.054
110	230	0.077	0.073	0.067	0.062	0.051	0.051	0.037	0.025	0.051	0.049	0.042	0.048	0.083	0.076	0.047
115	239	0.068	0.065	0.059	0.055	0.045	0.045	0.031	0.021	0.045	0.043	0.036	0.041	0.074	0.067	0.041
120	248	0.061	0.057	0.052	0.049	0.039	0.039	0.027	0.017	0.039	0.037	0.032	0.036	0.066	0.060	0.036
125	257	0.054	0.051	0.046	0.043	0.034	0.034	0.023	0.014	0.034	0.033	0.027	0.032	0.059	0.053	0.031
130	266	0.048	0.046	0.041	0.038	0.030	0.030	0.020	0.012	0.030	0.029	0.024	0.028	0.053	0.048	0.027
135	275	0.043	0.041	0.037	0.034	0.027	0.027	0.017	0.010	0.027	0.025	0.021	0.024	0.047	0.043	0.024
140	284	0.039	0.037	0.033	0.030	0.024	0.024	0.015	0.008	0.024	0.022	0.018	0.021	0.043	0.038	0.021
145	293	0.035	0.033	0.030	0.037	0.021	0.021	0.013	0.007	0.021	0.020	0.016	0.019	0.039	0.034	0.019
150	302	0.032	0.030	0.027	0.035	0.019	0.019	0.011	0.006	0.019	0.017	0.014	0.017	0.035	0.031	0.017
155	311	0.029	0.027	0.024	0.022	0.017	0.017	0.010	0.005	0.017	0.015	0.012	0.015	0.032	0.028	0.015
160	320	0.026	0.024	0.022	0.020	0.015	0.015	0.009	0.004	0.015	0.014	0.011	0.013	0.029	0.025	0.013
165	329	0.024	0.022	0.020	0.018	0.013	0.013	0.008	0.004	0.013	0.012	0.010	0.012	0.026	0.023	0.012
170	338	0.022	0.020	0.018	0.016	0.012	0.012	0.007	0.003	0.012	0.011	0.009	0.011	0.024	0.021	0.011
175	347	0.020	0.018	0.016	0.015	0.011	0.011	0.006	0.003	0.011	0.010	0.008	0.010	0.022	0.019	0.010
180	356	0.018	0.017	0.015	0.014	0.010	0.010	0.005	0.002	0.010	0.009	0.007	0.009	0.020	0.017	0.009
185	365	0.016	0.015	0.014	0.012	0.009	0.009	0.005	0.002	0.009	0.008	0.006	0.008	0.018	0.016	0.008
190	374	0.015	0.014	0.012	0.011	0.008	0.008	0.004	0.002	0.008	0.007	0.005	0.007	0.017	0.015	0.007
195	383	0.014	0.013	0.011	0.010	0.007	0.007	0.004	0.001	0.007	0.007	0.005	0.006	0.016	0.013	0.006
200	392	0.013	0.012	0.010	0.009	0.007	0.007	0.003	0.001	0.007	0.006	0.004	0.006	0.014	0.012	0.006
205	401	0.012	0.011	0.010	0.009	0.006	0.006	0.003	0.001	0.006	0.005	0.004	0.005	0.013	0.011	0.005
210	410	0.011	0.010	0.009	0.008	0.005	0.005	0.003	0.001	0.005	0.005	0.004	0.005	0.012	0.010	0.005
215	419	0.010	0.009	0.008	0.007	0.005	0.005	0.002	0.001	0.005	0.004	0.003	0.004	0.011	0.010	0.004
220	428	0.009	0.009	0.008	0.007	0.005	0.005	0.002	0.001	0.005	0.004	0.003	0.004	0.009	0.009	0.004
225	437	0.009	0.008	0.007	0.006	0.004	0.004	0.002	0.001	0.004	0.004	0.003	0.004	0.010	0.008	0.004
230	446	0.008	0.008	0.006	0.006	0.004	0.004	0.002	0.001	0.004	0.003	0.002	0.003	0.009	0.008	0.003
235	455	0.007	0.007	0.006	0.005	0.004	0.004	0.002	0.001	0.004	0.003	0.002	0.003	0.009	0.007	0.003
240	464	0.007	0.007	0.006	0.005	0.003	0.003	0.001	0.000	0.003	0.003	0.002	0.003	0.008	0.007	0.003
245	473	0.006	0.006	0.005	0.005	0.003	0.003	0.001	0.000	0.003	0.003	0.002	0.003	0.007	0.006	0.003
250	482	0.006	0.006	0.005	0.004	0.003	0.003	0.001	0.000	0.003	0.002	0.002	0.002	0.007	0.006	0.002

SMALL SIZE NTC THERMISTOR


2/ 3/ 5mm SERIES

2mm, 3mm, 5mm epoxy coated disk type thermistor is good for temperature compensation, temperature sensing and control.

Ordering Code

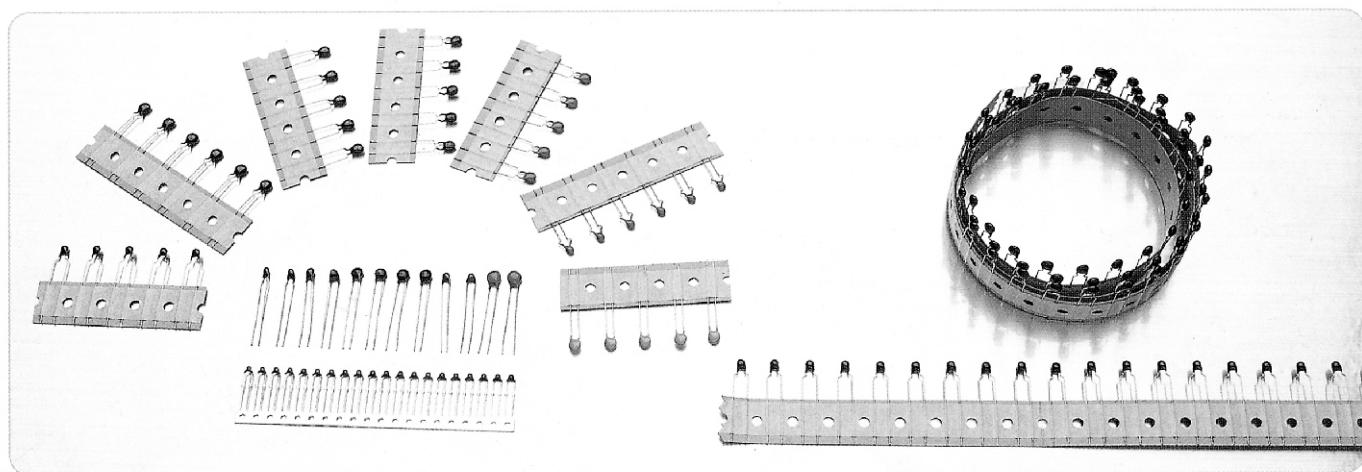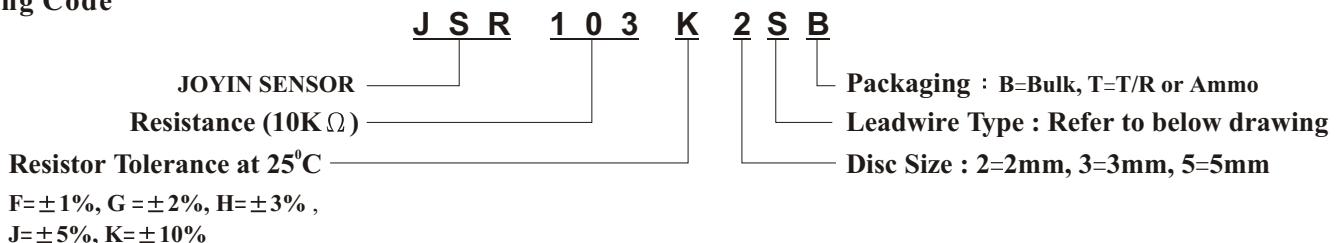

Shape & Dimension

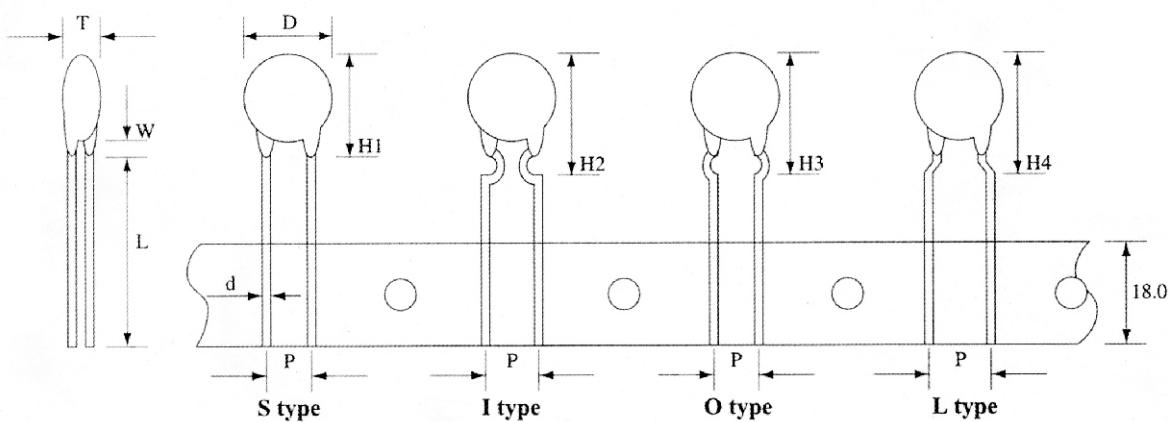

Series	D	T	L	d	P			W	H1	H2	H3	H4
					S/O	I	L					
2	max. 3.0	max. 3.0			2.5	5.0	2.5	3.0	5.0	6.0	7.0	8.0
3	max. 3.8	max. 3.0	max. 3.0	Φ 0.50 ± 0.05	-0.2	-0.2	5.0	3.0	7.0	7.0	8.0	7.0
5	max. 6.0	max. 3.5			+0.5	+0.5	5.0	3.0	8.0	8.0	9.0	8.0

* P =Wire pitch (Lead cut length is variable upon request)

* W=Coating length

* L =3.0~8.0mm



SMALL SIZE NTC THERMISTOR

2mm SERIES

2mm Series

Nominal Diameter	Part No.	Resistance at 25°C (Ω)	R. Tolerance (%)	Beta Constant (K, 25/85°C)	Rated Power at 25°C(mW)	Dissipation Constant (mw/ °C)	Time Constant (Sec.)	Max. Operating Temp.(°C)
2 mm	102_2	1,000	1, 2, 3, 5, 10	3500	100	2.0	8	120
	202_2	2,000	1, 2, 3, 5, 10	3550	100	2.0	8	120
		2,000	1, 2, 3, 5, 10	3620	100	2.0	8	120
	302_2	3,000	1, 2, 3, 5, 10	5750	100	2.0	8	120
	402_2	4,000	1, 2, 3, 5, 10	3800	100	2.0	8	120
	472_2	4,700	1, 2, 3, 5, 10	3850	100	2.0	8	120
	502_2	5,000	1, 2, 3, 5, 10	3850	100	2.0	8	120
		5,000	1, 2, 3, 5, 10	3910	100	2.0	8	120
	103_2	10,000	1, 2, 3, 5, 10	3435	100	2.0	8	120
		10,000	1, 2, 3, 5, 10	3500	100	2.0	8	120
		10,000	1, 2, 3, 5, 10	3950	100	2.0	8	120
	123_2	12,000	1, 2, 3, 5, 10	3970	100	2.0	8	120
	153_2	15,000	1, 2, 3, 5, 10	4000	100	2.0	8	120
	203_2	20,000	1, 2, 3, 5, 10	4050	100	2.0	8	120
	253_2	25,000	1, 2, 3, 5, 10	4050	100	2.0	8	120
	303_2	30,000	1, 2, 3, 5, 10	4100	100	2.0	8	120
	333_2	33,000	1, 2, 3, 5, 10	4100	100	2.0	8	120
	473_2	47,000	1, 2, 3, 5, 10	4150	100	2.0	8	120
	503_2	50,000	1, 2, 3, 5, 10	4200	100	2.0	8	120
	683_2	68,000	1, 2, 3, 5, 10	4200	100	2.0	8	120
	104_2	100,000	1, 2, 3, 5, 10	4350	100	2.0	8	120
	154_2	150,000	1, 2, 3, 5, 10	4400	100	2.0	8	120
	204_2	200,000	1, 2, 3, 5, 10	4500	100	2.0	8	120
	224_2	220,000	1, 2, 3, 5, 10	4500	100	2.0	8	120
	404_2	400,000	1, 2, 3, 5, 10	4750	100	2.0	8	120

Resistor tolerance : F(±1%), G(±2%), H(±3%), J(±5%), K(±10%)



SMALL SIZE NTC THERMISTOR

3 / 5mm SERIES

3mm Series

Nominal Diameter	Part No.	Resistance at 25°C (Ω)	Resistor Tolerance (%)	Beta Constant (K, 25/85°C)	Rated Power at 25°C (mW)	Dissipation Constant (mw/°C)	Time Constant (Sec.)	Max. Operating Temp. (°C)
3 mm	101_3	100	1, 2, 3, 5, 10	3180	200	2.8	14	120
	121_3	120	1, 2, 3, 5, 10	3180	200	2.8	14	120
	151_3	150	1, 2, 3, 5, 10	3180	200	2.8	14	120
	201_3	200	1, 2, 3, 5, 10	3200	200	2.8	14	120
	501_3	500	1, 2, 3, 5, 10	3430	200	2.8	14	120
	102_3	1,000	1, 2, 3, 5, 10	3600	200	2.8	14	120
	152_3	1,500	1, 2, 3, 5, 10	3650	200	2.8	14	120
		1,500	1, 2, 3, 5, 10	4150	200	2.8	14	120
	202_3	2,000	1, 2, 3, 5, 10	3750	200	2.8	14	120
		2,000	1, 2, 3, 5, 10	4200	200	2.8	14	120
	222_3	2,200	1, 2, 3, 5, 10	3750	200	2.8	14	120
	252_3	2,500	1, 2, 3, 5, 10	3750	200	2.8	14	120
	272_3	2,700	1, 2, 3, 5, 10	3800	200	2.8	15	120
	302_3	3,000	1, 2, 3, 5, 10	3850	200	2.8	15	120
	332_3	3,300	1, 2, 3, 5, 10	3850	200	2.8	15	120
	402_3	4,000	1, 2, 3, 5, 10	3850	200	2.8	15	120
	472_3	4,700	1, 2, 3, 5, 10	3900	200	2.8	15	120
	502_3	5,000	1, 2, 3, 5, 10	3450	200	2.9	15	120
		5,000	1, 2, 3, 5, 10	3900	200	2.9	15	120
	682_3	6,800	1, 2, 3, 5, 10	3900	200	2.9	15	120
	103_3	10,000	1, 2, 3, 5, 10	3450	200	3.0	15	120
		10,000	1, 2, 3, 5, 10	3970	200	3.0	15	120
		10,000	1, 2, 3, 5, 10	4040	200	3.0	15	120
	123_3	12,000	1, 2, 3, 5, 10	3970	200	3.0	15	120
	153_3	15,000	1, 2, 3, 5, 10	4050	200	3.0	15	120
		15,000	1, 2, 3, 5, 10	4150	200	3.0	15	120
	203_3	20,000	1, 2, 3, 5, 10	4100	200	3.0	16	120
	223_3	22,000	1, 2, 3, 5, 10	4100	200	3.0	16	120
	253_3	25,000	1, 2, 3, 5, 10	4150	200	3.0	16	120
	303_3	30,000	1, 2, 3, 5, 10	4150	200	3.0	16	120
	333_3	33,000	1, 2, 3, 5, 10	4150	200	3.0	16	120
	403_3	40,000	1, 2, 3, 5, 10	4200	200	3.0	16	120
	473_3	47,000	1, 2, 3, 5, 10	4250	200	3.0	16	120
	503_3	50,000	1, 2, 3, 5, 10	4280	200	3.0	16	120
	683_3	68,000	1, 2, 3, 5, 10	4350	200	3.0	16	120
	104_3	100,000	1, 2, 3, 5, 10	4350	200	3.0	16	120
		100,000	1, 2, 3, 5, 10	4500	200	3.0	16	120
	154_3	150,000	1, 2, 3, 5, 10	4600	200	3.0	16	120
	204_3	200,000	1, 2, 3, 5, 10	4700	200	3.0	16	120
	224_3	220,000	1, 2, 3, 5, 10	4720	200	3.0	16	120
	244_3	240,000	1, 2, 3, 5, 10	4450	200	3.0	16	120
	304_3	300,000	1, 2, 3, 5, 10	4800	200	3.0	16	120
	334_3	330,000	1, 2, 3, 5, 10	4800	200	3.0	16	120
	404_3	400,000	1, 2, 3, 5, 10	4900	200	3.0	16	120
	474_3	470,000	1, 2, 3, 5, 10	4750	200	3.0	16	120
		470,000	1, 2, 3, 5, 10	5000	200	3.0	16	120
	504_3	500,000	1, 2, 3, 5, 10	5050	200	3.0	16	120
	105_3	1,000,000	1, 2, 3, 5, 10	5300	200	3.0	16	120

5mm Series

Nominal Diameter	Part No.	Resistance at 25°C (Ω)	Resister Tolerance (%)	Beta Constant (K, 25/85°C)	Rated Power at 25°C (mW)	Dissipation Constant (mw/°C)	Time Constant (Sec.)	Max. Operating Temp. (°C)
100_5	10	1, 2, 3, 5, 10	3100	450	7.2	18	120	
150_5	15	1, 2, 3, 5, 10	3100	450	7.2	18	120	
200_5	20	1, 2, 3, 5, 10	3100	450	7.2	18	120	
330_5	33	1, 2, 3, 5, 10	3150	450	7.2	18	120	
450_5	45	1, 2, 3, 5, 10	3180	450	7.2	18	120	
500_5	50	1, 2, 3, 5, 10	3180	450	7.2	18	120	
700_5	70	1, 2, 3, 5, 10	3200	450	7.2	18	120	
850_5	85	1, 2, 3, 5, 10	3230	450	7.2	18	120	
900_5	90	1, 2, 3, 5, 10	3230	450	7.2	18	120	
101_5	100	1, 2, 3, 5, 10	3260	450	7.2	18	120	
121_5	120	1, 2, 3, 5, 10	3300	450	7.2	18	120	
201_5	200	1, 2, 3, 5, 10	3400	450	7.2	18	120	
221_5	220	1, 2, 3, 5, 10	3400	450	7.2	18	120	
251_5	250	1, 2, 3, 5, 10	3450	450	7.2	18	120	
301_5	300	1, 2, 3, 5, 10	3500	450	7.2	18	120	
351_5	350	1, 2, 3, 5, 10	3500	450	7.2	18	120	
401_5	400	1, 2, 3, 5, 10	3550	450	7.2	18	120	
501_5	500	1, 2, 3, 5, 10	3600	450	7.2	18	120	
601_5	600	1, 2, 3, 5, 10	3600	450	7.2	18	120	
681_5	680	1, 2, 3, 5, 10	3650	450	7.2	18	120	
801_5	800	1, 2, 3, 5, 10	3750	450	7.2	18	120	
901_5	900	1, 2, 3, 5, 10	3750	450	7.2	18	120	
102_5	1,000	1, 2, 3, 5, 10	3750	450	7.3	18	120	
	1,000	1, 2, 3, 5, 10	3850	450	7.3	18	120	
142_5	1,400	1, 2, 3, 5, 10	3800	450	7.3	18	120	
152_5	1,500	1, 2, 3, 5, 10	3800	450	7.3	18	120	
202_5	2,000	1, 2, 3, 5, 10	3850	450	7.3	18	120	
222_5	2,200	1, 2, 3, 5, 10	3850	450	7.3	18	120	
252_5	2,500	1, 2, 3, 5, 10	3900	450	7.3	18	120	
272_5	2,700	1, 2, 3, 5, 10	3900	450	7.3	19	120	
302_5	3,000	1, 2, 3, 5, 10	3900	450	7.3	19	120	
332_5	3,300	1, 2, 3, 5, 10	3900	450	7.3	19	120	
352_5	3,500	1, 2, 3, 5, 10	3900	450	7.3	19	120	
402_5	4,000	1, 2, 3, 5, 10	3950	450	7.3	19	120	
452_5	4,500	1, 2, 3, 5, 10	3950	450	7.3	19	120	
472_5	4,700	1, 2, 3, 5, 10	4000	450	7.3	19	120	
502_5	5,000	1, 2, 3, 5, 10	4050	450	7.3	19	120	
682_5	6,800	1, 2, 3, 5, 10	4050	450	7.3	19	120	
	10,000	1, 2, 3, 5, 10	4050	450	7.5	19	120	
	10,000	1, 2, 3, 5, 10	4150	450	7.5	19	120	
	10,000	1, 2, 3, 5, 10	4250	450	7.5	19	120	
123_5	12,000	1, 2, 3, 5, 10	4150	450	7.5	19	120	
153_5	15,000	1, 2, 3, 5, 10	4200	450	7.5	19	120	
203_5	20,000	1, 2, 3, 5, 10	4260	450	7.5	20	120	
253_5	25,000	1, 2, 3, 5, 10	4300	450	7.5	20	120	
303_5	30,000	1, 2, 3, 5, 10	4400	450	7.5	20	120	
333_5	33,000	1, 2, 3, 5, 10	4400	450	7.5	20	120	
403_5	40,000	1, 2, 3, 5, 10	4450	450	7.5	20	120	
473_5	47,000	1, 2, 3, 5, 10	4550	450	7.5	20	120	
503_5	50,000	1, 2, 3, 5, 10	4450	450	7.5	20	120	
	50,000	1, 2, 3, 5, 10	4600	450	7.5	20	120	
104_5	100,000	1, 2, 3, 5, 10	4750	450	7.5	20	120	
154_5	150,000	1, 2, 3, 5, 10	4000	450	7.5	20	120	
204_5	200,000	1, 2, 3, 5, 10	4638	450	7.5	20	120	
	200,000	1, 2, 3, 5, 10	5000	450	7.5	20	120	
224_5	220,000	1, 2, 3, 5, 10	5000	450	7.5	20	120	
334_5	330,000	1, 2, 3, 5, 10	5050	450	7.5	20	120	
404_5	400,000	1, 2, 3, 5, 10	5200	450	7.5	20	120	
474_5	470,000	1, 2, 3, 5, 10	5100	450	7.5	20	120	
	470,000	1, 2, 3, 5, 10	5350	450	7.5	20	120	
504_5	500,000	1, 2, 3, 5, 10	5350	450	7.5	20	120	

Resistor tolerance : F(±1%), G(±2%), H(±3%), J(±5%), K(±10%)



SMALL SIZE NTC THERMISTOR

ASSEMBLY SERIES



Ordering Code

JOYIN's Assembly Thermister

Resistance (10K ohms)

A 103 F 2 - X X X X

Special Code : Lead Length
Head Shape
Housing etc

Size : P=Chip, 2.2 φ, 3.3 φ, 5.5 φ

Resistor Tolerance :
F=±1%, G=±2%,
H=±3%, J=±5%

Specification

Please refer to the specification of chip and disk type thermistor.

Shape

SHAPE	OPERATING TEMPERATURE	THERMAL TIME CONSTANT	DISSIPATION FACTOR
WATER TEMPERATURE SENSOR FOR OIL BOILER	-20°C to 105°C	12sec (in water)	6mw/°C
WATER TEMPERATURE SENSOR FOR GAS BOILER	-20°C to 120°C	2.5sec (in water)	2.5mw/°C
RANGE HOOD	-20°C to 180°C	60sec (in air)	3mw/°C
OVEN RANGE	-20°C to 85°C	80sec (in air)	3mw/°C
RAC (TWIN TYPE)	-20°C to 85°C	15sec (in water)	7.5mw/°C
ROOM TEMPERATURE SENSOR	-20°C to 85°C	25sec (in air)	8.5mw/°C
DETECTION OF REFRIGERATOR	-40°C to 80°C	75sec (in air)	3.0mw/°C
DETECTION OF EVAPORATOR	-40°C to 80°C	125sec (in air)	4.0mw/°C
FAN CONTROL SENSOR	-20°C to 120°C	8sec (in air)	7.5mw/°C
TEMPERATURE SENSOR	-20°C to 85°C	25sec (in air)	7.5mw/°C
BIDET	0°C to 90°C	18sec (in air)	3.5mw/°C
VENDING MACHINE	-20°C to 80°C	30sec (in water)	5mw/°C



久尹股份有限公司
JOYIN CO., LTD.

Headquarters and Sales Office

久尹股份有限公司

JOYIN CO., LTD.

臺灣省桃園縣楊梅鎮東流里水流東 39-1 號
39-1, Shui Liu Tung, Tung Liu Li, Yangmei,
Taoyuan, Taiwan 32651

Tel : 886-3-475-5094

Fax : 886-3-475-6835

<http://www.joyin.com.tw>

e-mail : sales@joyin.com.tw

Hong Kong Office

歡進電子有限公司

JOYIN ELECTRONICS CO., LTD.

香港九龍九龍灣常悅道 20 號環球工商大廈 1 樓 15 室
Rm. 15, 1st Floor, International Plaza, No. 20, Sheung Yuet Road,
Kowloon Bay, Kowloon, Hong Kong
Tel : 852-2397-3382 (4 Lines)
Fax : 852-2397-3413
e-mail : joyin@netvigator.com

China Dongguan Factory

東莞久尹電子有限公司

DONGGUAN JOYIN ELECTRONICS CO., LTD.

中國廣東省東莞市南城區周溪環博將軍路9 號
No. 9, Jiang-Jun Road, Huan Bo, Zhou Xi, Nan-Cheng District,
Dongguan, Guangdong Province, China 523078
Tel : 86-769-240-2759
Fax : 86-769-240-4831

China Suzhou Factory

久尹科技(蘇州)有限公司

JOYIN TECHNOLOGY(SUZHOU) CO., LTD.

中國江蘇省蘇州市蘇州新區火炬路 83 號
No. 83, Huo Ju Road, Suzhou New District,
Suzhou City, Jiangsu Province, China 215009
Tel : 86-512-6808-6599
Fax : 86-512-6808-6099