


SX-6025 SERIES

General specifications


- ★ Frame & Impeller: Plastic material (UL94V-0)
- ★ Lead Wire: UL Type or Equivalent (+)Red, (-)Black
- ★ Operating temperature: -10℃~+70℃, 35%~85% RH
- ★ Storage temperature: -40℃~+90℃, 35%~85% RH
- ★ Life Time: Sleeve bearing 30,000 hrs(25℃)
Ball bearing 50,000 hrs(25℃)



P-Q Curve

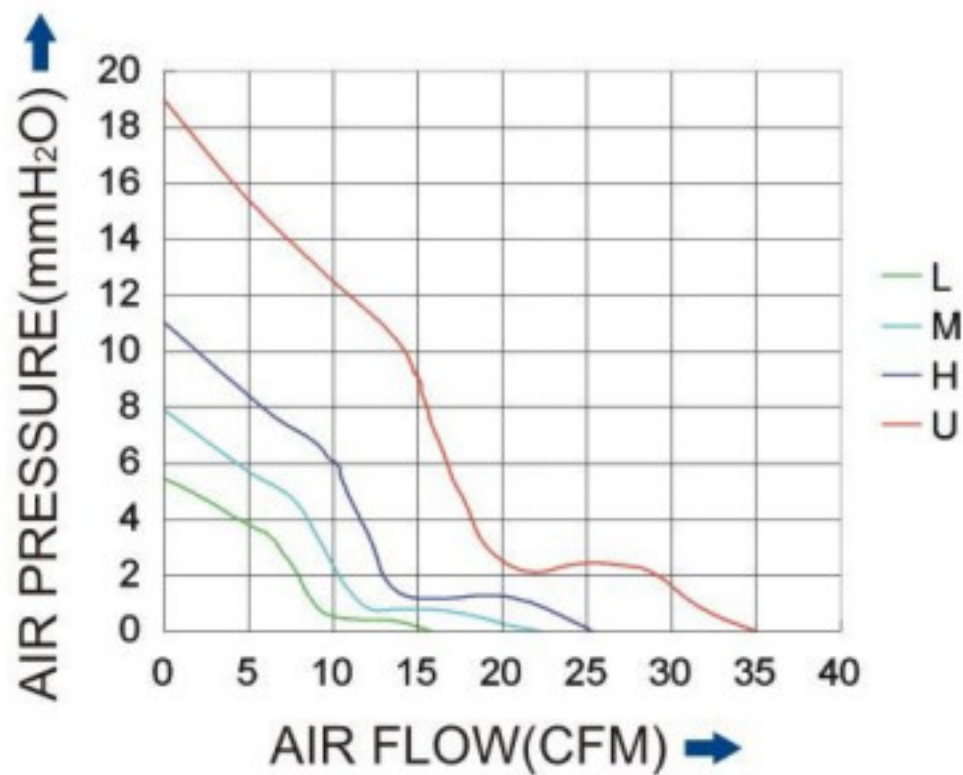

Dimensions(Unit:mm)

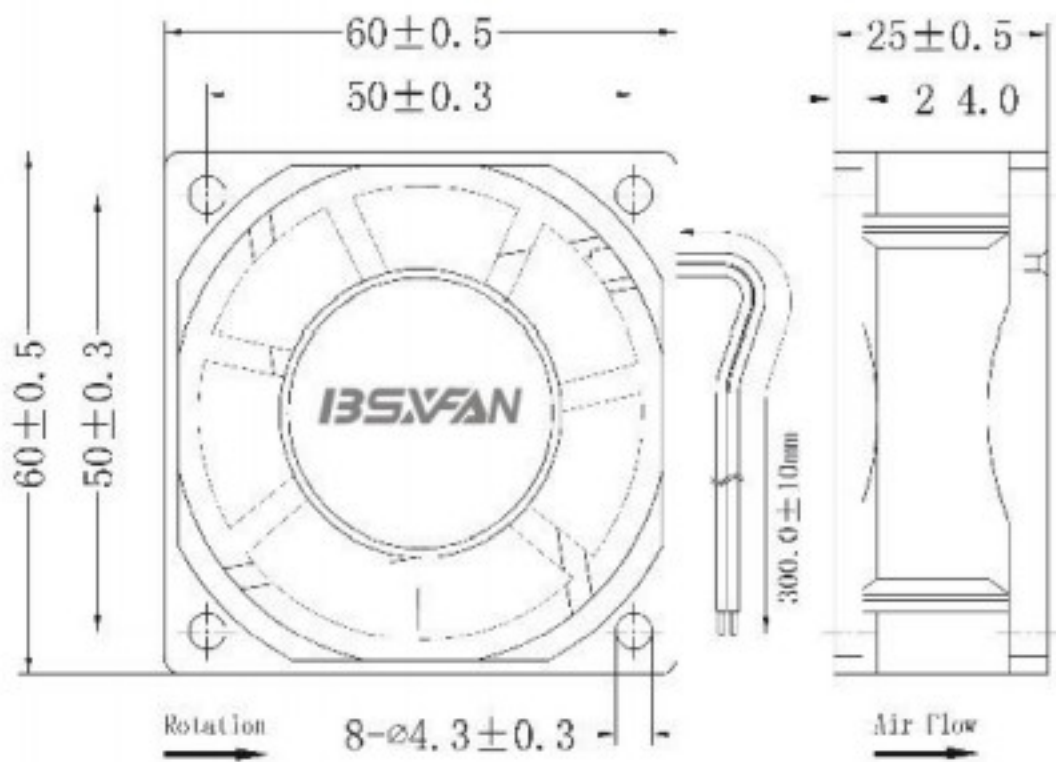

Specifications

Fan Size L×W×T mm	Model No.	Rated Voltage VDC	Started Voltage VDC	Rated Current A	Speed RPM	Air Flow CFM	Static Pressure mmH ₂ O	Noise Level dBA	Available Features				Weight Gram.	Packing pcs/ctn
60x60x25	SX-6025LB5	5	3.2	0.40	4000	15.8	5.5	29.7	√	√	√	√	56.00	400
	SX-6025MB5			0.50	5000	22.3	7.9	36.2	√	√	√	√		
	SX-6025HB5			0.70	6000	25.4	11.1	41.3	√	√	√	√		
	SX-6025LB1	12	6	0.18	4000	15.8	5.5	29.7	√	√	√	√		
	SX-6025MB1			0.23	5000	22.3	7.9	36.2	√	√	√	√		
	SX-6025HB1			0.32	6000	25.4	11.1	41.3	√	√	√	√		
	SX-6025UB1			0.50	8000	35.0	19.0	48.7	√	√	√	√		
	SX-6025LB2	24	12	0.09	4000	15.8	5.5	29.7	√	√	√	√		
	SX-6025MB2			0.14	5000	22.3	7.9	36.2	√	√	√	√		
	SX-6025HB2			0.21	6000	25.4	11.1	41.3	√	√	√	√		
	SX-6025UB2			0.30	8000	35.0	19.0	48.7	√	√	√	√		
	SX-6025LB4	48	24	0.06	4000	15.8	5.5	29.7	√	√	√	√		
	SX-6025MB4			0.09	5000	22.3	7.9	36.2	√	√	√	√		
	SX-6025HB4			0.14	6000	25.4	11.1	41.3	√	√	√	√		
	SX-6025UB4			0.18	8000	35.0	19.0	48.7	√	√	√	√		

- ★ Notes: Two types of bearing: S(Sleeve bearing) B(Ball bearing)
- Functions available: FG(Frequency Generator or Tachometer Output) RD(Rotation Detector)
- TC(Temperature Control) PWM(Pulse Width Modulation)

Specifications are subject to change without notice.Please refer to the formally issued product specification via contacting us!

Certificate

