
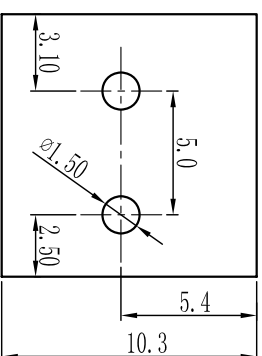


产品规格书
product specification

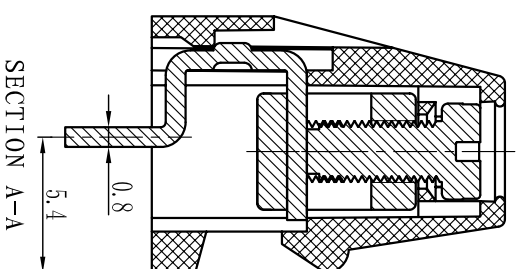

SECTION A-A

电气性能/Electrical

参考标准/Standard: UL IEC

额定电压/Rated voltage:	300V	250V
---------------------	------	------

额定电流/Rated current:	10A	18A
---------------------	-----	-----

接觸電阻/Contact resistance: 20mΩ

使用线径/Wire range: 22-12AWG 2.5mm²

耐电压/Withstanding voltage: AC2000V/1Min

绝缘电阻/Insulation resistance: 500M Ω /DC500V

机械性能/Mechanical

温度范围/Temp.Range: $-40^{\circ}\text{C}^{\sim}+105^{\circ}\text{C}$

扭 矩/Torque: 0.4Nm(3.51lb`in)

剥线长度/Strip length: 6-7 mm

尺寸/Dimensions

间距/Pitch: 5.0mm

极数/Poles: 2P-24P

材质及电镀/ Material

塑件/Housing: PA66, UL94V-0

螺丝/Screws: M2.5, steel Zinc plated

方塊/Cage: Brass, Ni plated

焊头/Pin header: Brass, Sn1e plated

订购方式：
HOW TO ORDER

X	X	X	X
客	需	求	
户	而		
Cus	Request		

型号/Model	规格/POLE	0 未定义/No definition 1 单音/Sing pitch 2 双音/Double pitch	灰色/Gray 10 蓝色/Blue 20 黑色/Black 30	绿色/Green 40 棕色/Orange 50 红色/Red 60	透明/Transparent 70 黄色/Yellow 80 白色/White 90
----------	---------	---	---	--	--

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	$\sphericalangle$	short angle sid			$\equiv$	—	$\square$	//	$\perp$		
	over	over	over	over		over	$\sphericalangle$	over	over	over		over	over	over			
variable range	6	30	120	480		6	$\sphericalangle$	10	50	120		5	30	120			
	to	to	to	to	all	to	$\sphericalangle$	to	to	to	all	to	to	to			
tolerance	± 0.1	± 0.2	± 0.3	± 0.5	± 0.9	± 0.2	± 0.5	± 1	1°	$30'$	$20'$	$10'$	0.5	0.025	0.06	0.12	0.4

第一视角 / FIRST ANGLE PROJECTION		
单位 / UNITS mm	尺寸 / SIZE A4	比例 / SCALE 比例
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD		
名称 / NAME WJ128-XP-1YY-00A		